


DRAWING FOR CUSTOMER

NOTES:

- 1.HUOSING: LCP-6808 HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.ACTUATOR: PPS-R4 HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 3.TERMINAL:PHOSPHOR BRONZE
PLATING:1u" GOLD FLASH OR 100~150u" TIN(LEAD FREE)
OVERALL 50~100u" NICKEL UNDER PLATED.
- 4.FITTING NAIL:BRASS
PLATING:100~150u" TIN(LEAD FREE)
OVERALL 50~100u" NICKEL UNDER PLATED.



KBF501-XX X S V 200 R 2 A

Pin No.

Version

包装方式:

T:TUBE (管装)

R:REEL (卷装)

P: PE (袋装)

Mold No.

Contacts Type:U:Upper

L:Lower

R:Right

F:Left

D:Double

S:SMT

R:Right Angle




V:Vertical

H厚度: 1.0mm=100

1.2mm=120


1.5mm=150

2.0mm=200

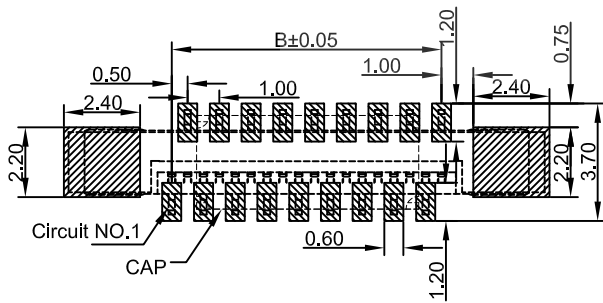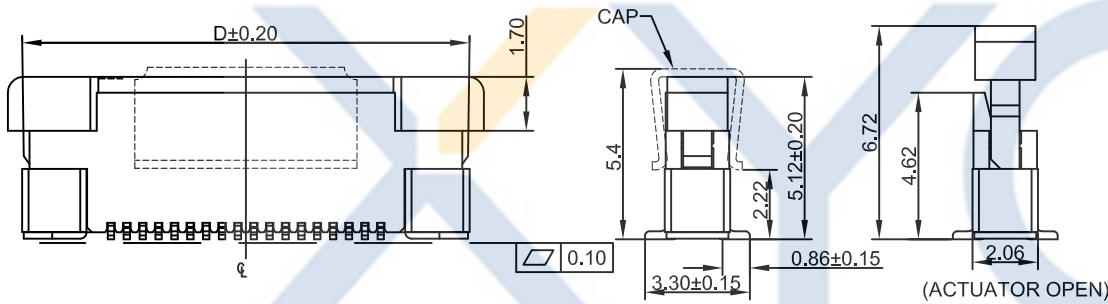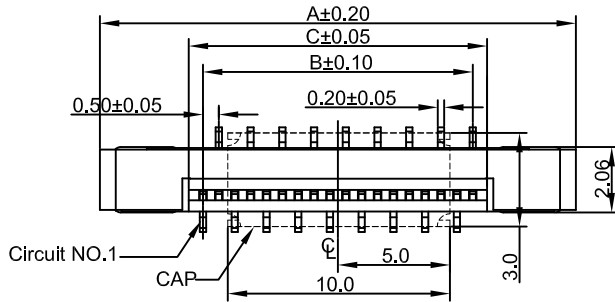

RECOMMENDED PCB PATTERN DIM.

TOLERANCE:±0.05

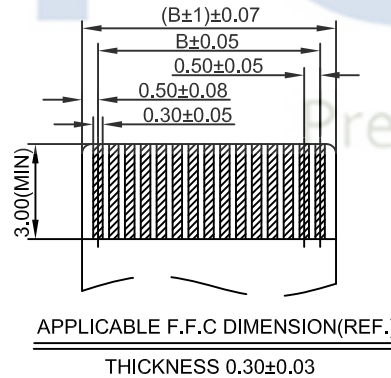

APPLICABLE F.F.C DIMENSION(REF.)

THICKNESS 0.30±0.03

No. of contacts	Dimensions				No. of contacts	Dimensions			
	A.	B.	C.	D.		A.	B.	C.	D.
4	8.0	1.5	2.6	7.1	33	22.5	16.0	17.1	21.6
5	8.5	2.0	3.1	7.6	34	23.0	16.5	17.6	22.1
6	9.0	2.5	3.6	8.1	35	23.5	17.0	18.1	22.6
7	9.5	3.0	4.1	8.6	36	24.0	17.5	18.6	23.1
8	10.0	3.5	4.6	9.1	37	24.5	18.0	19.1	23.6
9	10.5	4.0	5.1	9.6	38	25.0	18.5	19.6	24.1
10	11.0	4.5	5.6	10.1	39	25.5	19.0	20.1	24.6
11	11.5	5.0	6.1	10.6	40	26.0	19.5	20.6	25.1
12	12.0	5.5	6.6	11.1	41	26.5	20.0	21.1	25.6
13	12.5	6.0	7.1	11.6	42	27.0	20.5	21.6	26.1
14	13.0	6.5	7.6	12.1	43	27.5	21.0	22.1	26.6
15	13.5	7.0	8.1	12.6	44	28.0	21.5	22.6	27.1
16	14.0	7.5	8.6	13.1	45	28.5	22.0	23.1	27.6
17	14.5	8.0	9.1	13.6	46	29.0	22.5	23.6	28.1
18	15.0	8.5	9.6	14.1	47	29.5	23.0	24.1	28.6
19	15.5	9.0	10.1	14.6	48	30.0	23.5	24.6	29.1
20	16.0	9.5	10.6	15.1	49	30.5	24.0	25.1	29.6
21	16.5	10.0	11.1	15.6	50	31.0	24.5	25.6	30.1
22	17.0	10.5	11.6	16.1	51	31.5	25.0	26.1	30.6
23	17.5	11.0	12.1	16.6	52	32.0	25.5	26.6	31.1
24	18.0	11.5	12.6	17.1	53	32.5	26.0	27.1	31.6
25	18.5	12.0	13.1	17.6	54	33.0	26.5	27.6	32.1
26	19.0	12.5	13.6	18.1	55	33.5	27.0	28.1	32.6
27	19.5	13.0	14.1	18.6	56	34.0	27.5	28.6	33.1
28	20.0	13.5	14.6	19.1	57	34.5	28.0	29.1	33.6
29	20.5	14.0	15.1	19.6	58	35.0	28.5	29.6	34.1
30	21.0	14.5	15.6	20.1	59	35.5	29.0	30.1	34.6
31	21.5	15.0	16.1	20.6	60	36.0	29.5	30.6	35.1
32	22.0	15.5	16.6	21.1	61	36.5	30.0	31.1	35.6

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

				TOLERANCE 公差	DRAWING 設計者	John	KBF501-XXXSV200R2A	
2015-04-28	A			.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	APPROVED 核准	William	DWG NO. 圖號	PE1904005A

UNIT 單位	mm	PRODUCT NAME 產品名稱	0.5 ZIF FPC CONN.SMT R/A RIGHT CONTACT
------------	----	----------------------	---