
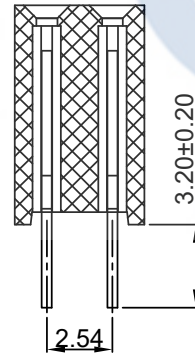
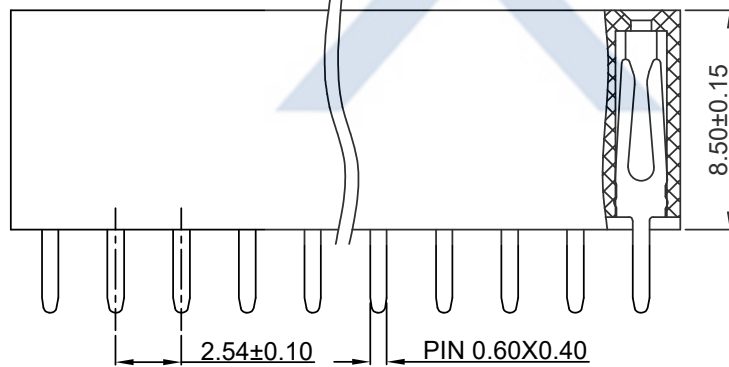


# DRAWING FOR CUSTOMER

- SPEC.:**  
 ●Rated Current:3.0A AC,DC  
 ●Withstand Voltage:1000V AC/minute  
 ●Insulation Resistance:1000MΩ min  
 ●Contact Resistance: 20mΩ Max  
 ●Temperature Range:-40℃~+105℃
- Material:**  
 ●Insulator Material:PBT UL94V-0  
 ●Contact Material:Brass  
 ●Finish:Gold-plated,over Nickel  
 ●Max. Processing Temp:200℃ for 30-60seconds  
 (220℃ for 5seconds)

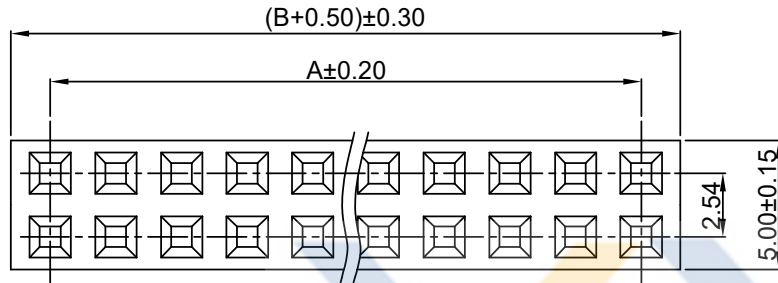

**KBM25418- D XX X D V 4 A**  
 Double row  
 Pin No.  
 包装方式:  
 T:TUBE (管装)  
 R:REEL (卷装)  
 P: PE (袋装)  
 A:TRAY (盒装)

Version  
 Mold No.  
 R:Right Angle  
 V:Vertical  
 S:SMT  
 D:DIP

Poles	A	B	Poles	A	B	Poles	A	B	Poles	A	B
1	—	2.54	11	25.40	27.94	21	50.80	53.34	31	76.20	78.74
2	2.54	5.08	12	27.94	30.48	22	53.34	55.88	32	78.74	81.28
3	5.08	7.62	13	30.48	33.02	23	55.88	58.42	33	81.28	83.82
4	7.62	10.16	14	33.02	35.56	24	58.42	60.96	34	83.82	86.36
5	10.16	12.70	15	35.56	38.10	25	60.96	63.50	35	86.36	88.90
6	12.70	15.24	16	38.10	40.64	26	63.50	66.04	36	88.90	91.44
7	15.24	17.78	17	40.64	43.18	27	66.04	68.58	37	91.44	93.98
8	17.78	20.32	18	43.18	45.72	28	68.58	71.12	38	93.98	96.52
9	20.32	22.86	19	45.72	48.26	29	71.12	73.66	39	96.52	99.06
10	22.86	25.40	20	48.26	50.80	30	73.66	76.20	40	99.06	101.60

**XYCO** 东莞市轩业电子科技有限公司  
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2020-08-10	A		KBM25418-DXXXDV4A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KBM25418-DXXXDV4A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	
						APPROVED 核准	William	DWG NO. 圖號	PE211208A

UNIT 單位	mm	PRODUCT NAME 產品名稱	PH2.54 FEMALE HEADER DUAL ROWS DIP TYPE Vertical BASE 8.50H Y型 PC3.2
------------	----	----------------------	---