DRAWING FOR CUSTOMER

KB951-X X H 2 A

Pin No.
Housing
Mold No.
Version



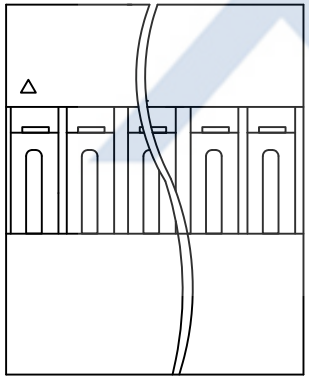

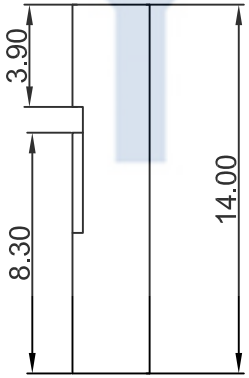

■SPEC.:
- ●Rated Voltage:250V AC,DC
- ●Rated Current:3A AC,DC
- ●Withstand Voltage:800V AC/minute
- ●Contact Resistance:20mΩ max
- ●Insulation Resistance:1000MΩ min
- ●Temperature Range:-25℃~+85℃

■Material:
- ●Insulator:PPO UL94V-0
  Color:Black

Poles	Dimensions (mm) A	Poles	Dimensions (mm) A	Poles	Dimensions (mm) A
1x01	2.54	1X11	30.48	1X21	53.34
1x02	5.08	1x12	30.48	1x22	55.88
1x03	7.62	1x13	33.02	1x23	58.42
1x04	10.16	1x14	35.56	1x24	60.96
1x05	12.70	1x15	38.10	1x25	63.50
1x06	15.24	1x16	40.64	1x26	66.04
1x07	17.78	1x17	43.18	1x27	68.58
1x08	20.32	1x18	45.72	1x28	71.12
1x09	22.86	1x19	48.26	1x29	73.58
1x10	25.40	1x20	50.80	1x30	76.20

XYCO Precision Connectors

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2015-09-10	A		KB951-XXH2A	Devin

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

DRAWING 設計者	Devin	KB951-XXH2A	
CHECKED 審查	Thomas	PART NO. 料號	
APPROVED 核准	Willian	DWG NO. 圖號	PE1903001A

UNIT 單位: mm

PRODUCT NAME 產品名稱: DUPONT PH2.54mm Wire To Board Single Row Housing