

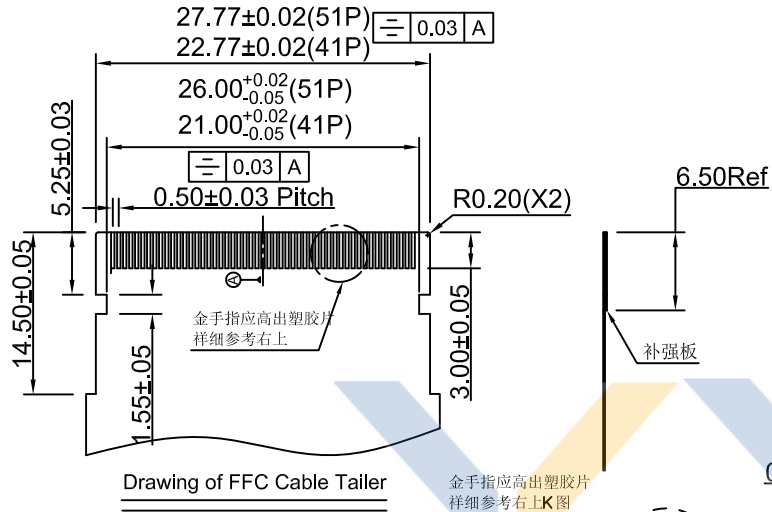
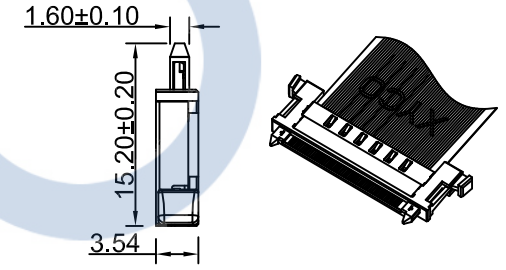
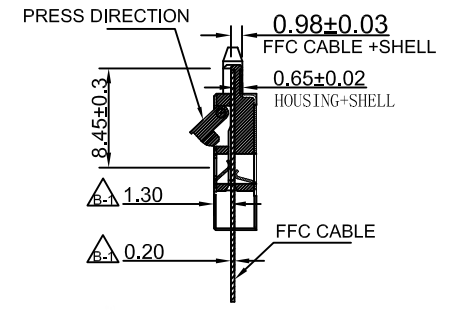
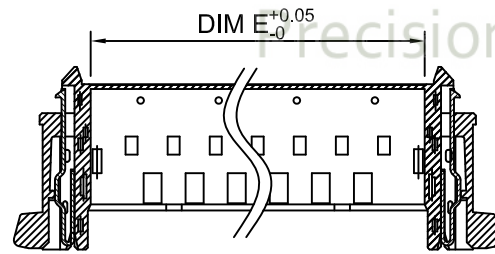
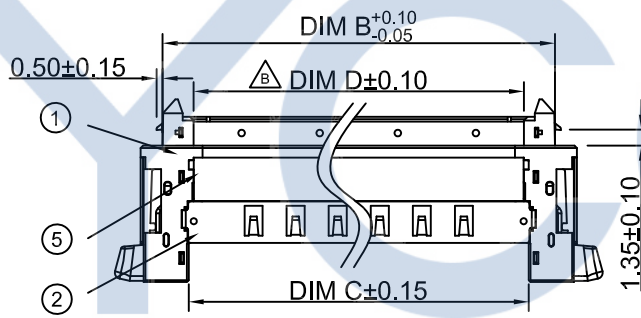
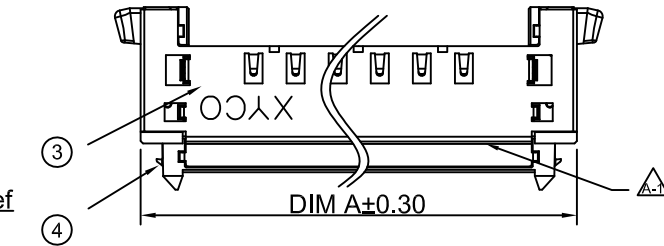


# DRAWING FOR CUSTOMER



Drawing of FFC Cable Tailer

金手指应高出塑胶片  
 详细参考右上K图

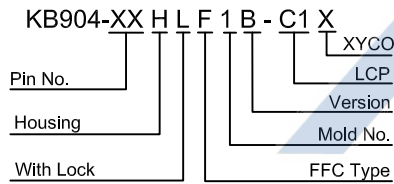

- SPEC.:
- Rated Voltage:200V AC,DC
  - Rated Current:0.7A AC,DC
  - Withstand Voltage:500V AC/minute
  - Contact Resistance:40mΩ max
  - Insulation Resistance:100MΩ min
  - Temperature Range:-40℃~+80℃
  - Applicable wire:FFC WIRE
  - QTY.:50PCS/Plate

5	Shaft	1	LCP UL94V-0	Black	Shaping
4	Lock	2	SUS T=0.25±0.01mm		Stamping
3	Lower shell	1	SUS T=0.20±0.02mm		Stamping
2	Upper shell	1	SUS T=0.15±0.02mm		Stamping
1	Housing	1	LCP UL94V-0	Black	Shaping

NO.	NAME	QUANTITY	MATERIAL	COLOR	REMARK	
	PART NO.	A	B	C	D	E
	51PIN	36.30	32.60	28.30	27.56	27.80
	41PIN	31.30	27.60	23.30	22.56	22.80

2017-09-08	B-1	产品完善,优化产品	KB904-XXHLFXB-C1X	刘造强
2017-04-18	B	产品完善,优化产品	KB904-XXHLFXB-C1X	刘造强
2013-11-20	A		KB904-XXHLFXA	谭火秦

TOLERANCE 公差	DRAWING 设计者	刘造强	KB904-XXHLFXB-C1X
.X±0.30 .XX±0.20 .XXX±0.10	CHECKED 审查	彭太坤	PART NO. 料號
	APPROVED 核准	谭宏	DWG NO. 圖號

**XYCO PRECISION CONNECTORS**  
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

UNIT 单位	mm	PRODUCT NAME 产品名称	FI-RE PH0.5mm Housing With Lock
		Single Grounding FFC TYPE	