


# DRAWING FOR CUSTOMER


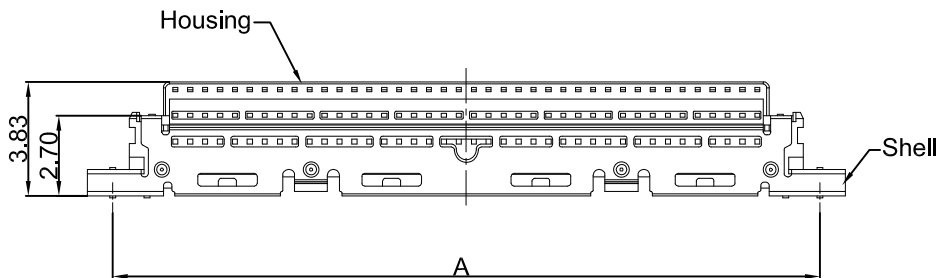


■SPEC.:

- Rated Voltage:100V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:250V AC/minute
- Contact Resistance:50mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-40℃~+85℃


■Material:

- Insulator:LCP UL94V-0,Black
- Contact Pin: Phospher Bronze  
Finish:Gold-plated,over Nickel
- Shell:Phospher Bronze  
Finish:Gold-plated,over Nickel



KB501-XX H 5 B-R 1  
 Pin No.                      Lengther  
 Housing                      Compal  
 Mold No.                      Version

Precision Connectors

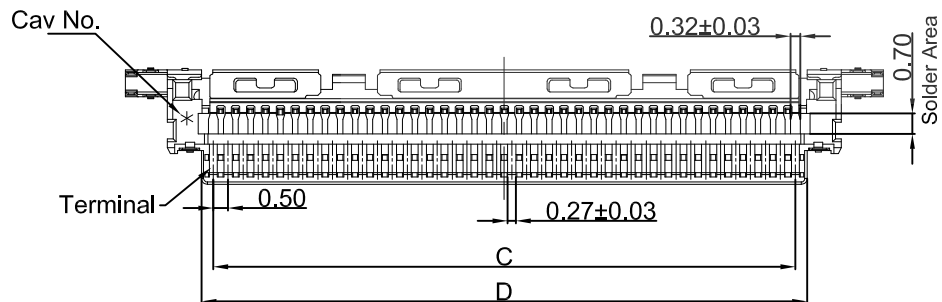

Poles	A	B	C	D
30	18.84	21.00	14.50	15.30
40	23.70	25.40	19.50	20.30
50	28.70	30.40	24.50	25.30

				TOLERANCE 公差	DRAWING 設計者	Devin	KB501-XXH5B-R1		<b>XYCO</b> 东莞市轩业电子科技有限公司 TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn	
2013-12-03	B	CHANGE HISTORY 變更歷史	KB501-XXH5B-R1	Devin	CHECKED 審查	Thomas	PART NO. 料號		UNIT 單位	PRODUCT NAME 產品名稱
DATE 日期	VER 版本					APPROVED 核准	William	DWG NO. 圖號	PE200810A	
1	2	3	4	5	6	7	8	9		