DRAWING FOR CUSTOMER

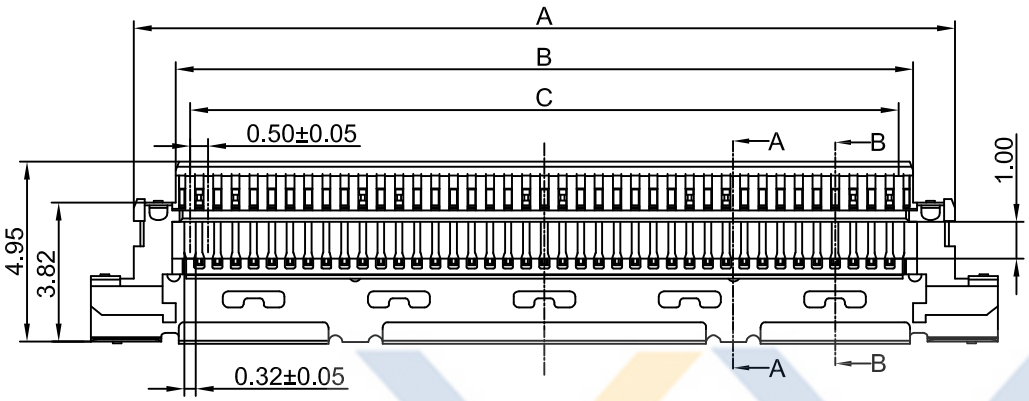

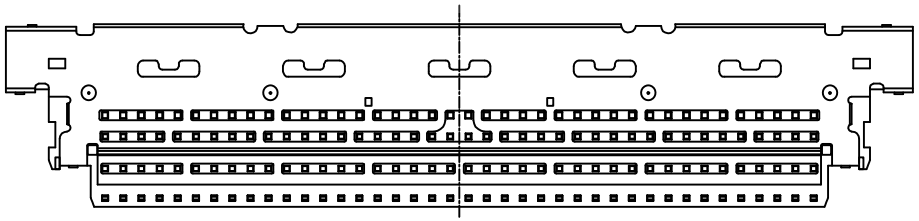



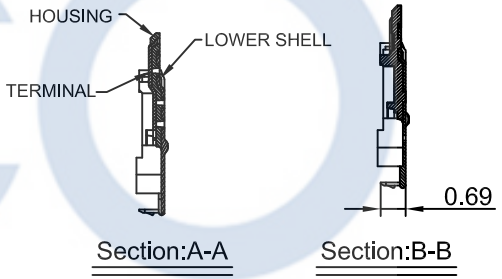

■SPEC.:
- ●Rated Voltage:100V AC,DC
- ●Rated Current:1A AC,DC
- ●Withstand Voltage:250V AC/minute
- ●Contact Resistance:50mΩ max
- ●Insulation Resistance:1000MΩ min
- ●Temperature Range:-40℃~+85℃

■Material:
- ●Insulator:LCP UL94V-0,Black
- ●Contact Pin: Phospher Bronze
  Finish:Gold-plated,over Nickel
- ●Shell:Phospher Bronze
  Finish:Gold-plated,over Nickel

Precision Connectors

KB501-XX H 3 A-R 1

- Pin No.
- Housing
- Mold No.
- Version
- Compal
- Lengther

Poles	A	B	C	D
30	17.60	15.30	14.50	19.95
40	22.60	23.30	19.50	24.95

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2014-11-09	A		KB501-XXH3A-R1	Devin

TOLERANCE 公 差
.X=±0.30
.XX=±0.20
.XXX=±0.10

DRAWING 設計者	Devin
CHECKED 審查	Thomas
APPROVED 核准	William

KB501-XXH3A-R1

PART NO. 料號

DWG NO. 圖號 PE1908015A

UNIT 單位 mm

PRODUCT NAME 產品名稱: 20454 PH0.50mm XXP Wire To Board Pull Bar Connector Wide version

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn