


DRAWING FOR CUSTOMER

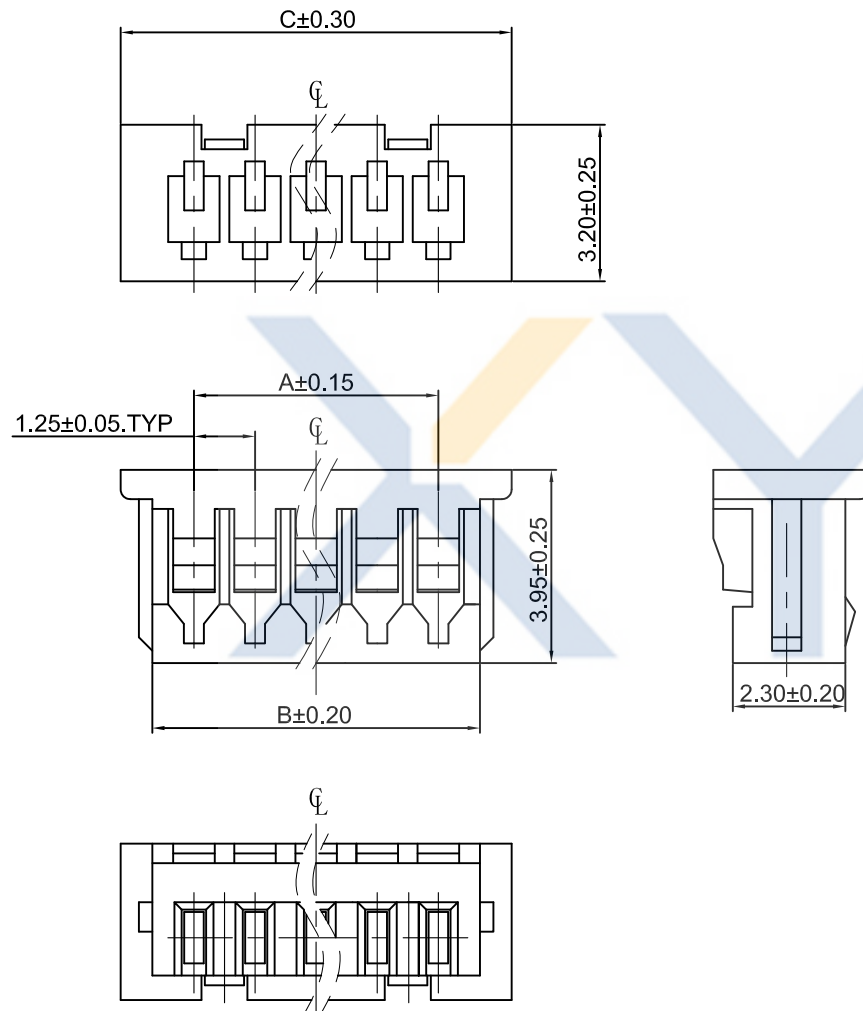

■SPEC.:

- Rated Voltage:125V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator:PA66 UL94V-0
- Color:White

KB915-XXH2A

Pin No.

Version

Housing

Mold No.

Poles	Dimensions (mm)		
	A	B	C
02	1.25	2.95	4.25
03	2.50	4.20	5.50
04	3.75	5.45	6.75
05	5.00	6.70	8.00
06	6.25	7.95	9.25
07	7.50	9.20	10.50
08	8.75	10.45	11.75
09	10.00	11.70	13.00
10	11.25	12.95	14.25
11	12.50	14.20	15.50
12	13.75	15.45	16.75
13	15.00	16.70	18.00
14	16.25	17.95	19.25
15	17.50	19.20	20.50

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-09-20		A	CHANGE HISTORY 變更歷史	KB915-XXH2A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB915-XXH2A		UNIT 單位		PRODUCT NAME 產品名稱	51021 PH1.25mm Wire To Board Housing
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	mm			
								APPROVED 核准	William	DWG NO. 圖號	PE1805002A			