

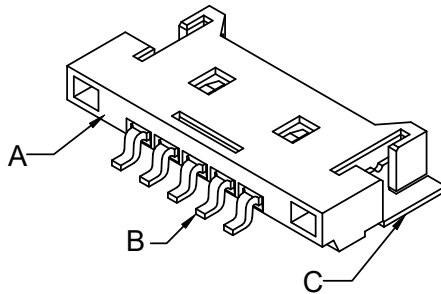
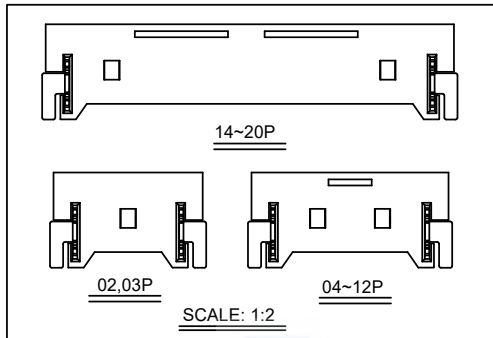

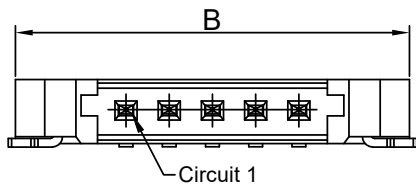
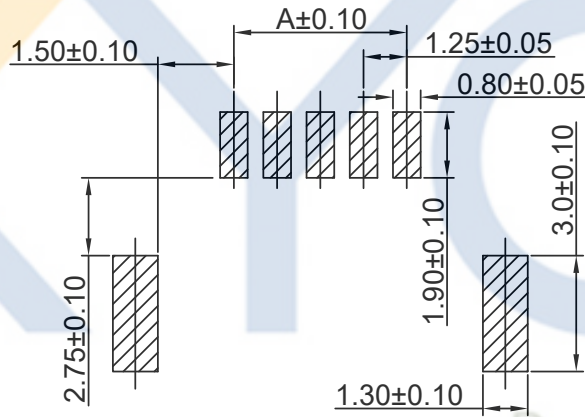


DRAWING FOR CUSTOMER

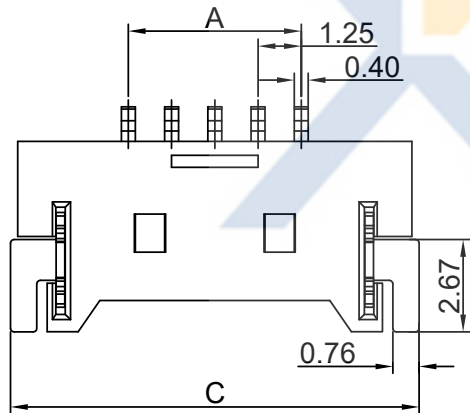

- SPEC.:
- Rated Voltage:125V AC,DC
 - Rated Current:1A AC,DC
 - Withstand Voltage:500V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-25℃~+85℃

- Material
- Insulator(A):P3-PA6T UL94V-0
Color:BGE-Beige;WH-White
 - Contact(B):Brass
Finish:Gold-Plated;over Nickel
 - Solder Tab(C):Brass
Finish:Tin-Plated;over Nickel

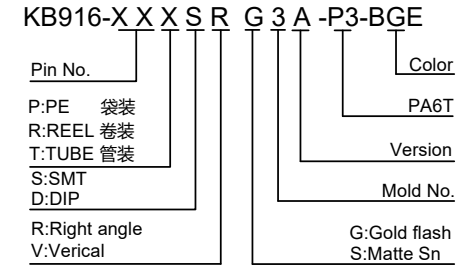

Poles	Dimensions(mm)		
	A	B	C
02	1.25	7.65	7.67
03	2.50	8.90	8.92
04	3.75	10.15	10.17
05	5.00	11.40	11.42
06	6.25	12.65	12.67
07	7.50	13.90	13.92
08	8.75	15.15	15.17
09	10.00	16.40	16.42
10	11.25	17.65	17.67
11	12.50	18.90	18.92
12	13.75	20.15	20.17
14	16.25	22.65	22.67
15	17.50	23.90	23.92
16	18.75	25.15	25.17
20	23.75	30.15	30.17
30	36.25	42.65	42.67

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2013-07-30		A	KB916-XXXSRG3A-P3-BGE		Devin	KB916-XXXSRG3A-P3-BGE	
DATE	VER	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin
日期	版本				.X=±0.30	CHECKED 審查	Thomas
					.XX=±0.20	APPROVED 核准	William
					.XXX=±0.10	DWG NO. 圖號	PE1902003A

UNIT	mm	PRODUCT NAME 產品名稱	51146 PH1.25mm Wire To Board SMT Right Angle Wafer