


# DRAWING FOR CUSTOMER

KB914- XX H L 2 A


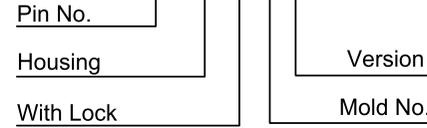


■SPEC.:



- Rated Voltage:125V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator:PA66 UL94V-0
- Color:White

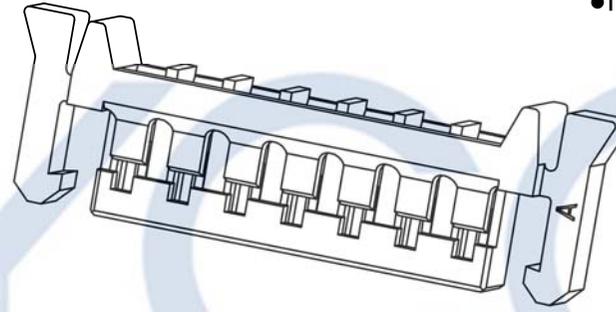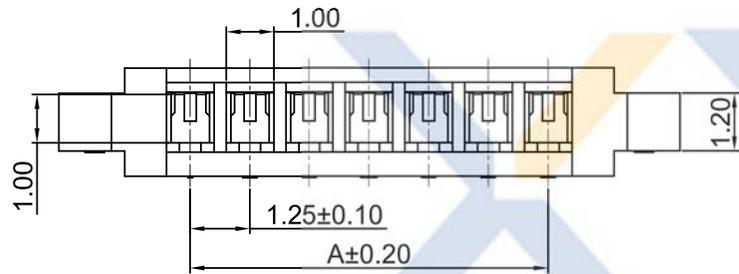

Poles	Dimensions(mm)	
	A	B
02	1.25	2.45
03	2.50	3.70
04	3.75	4.95
05	5.00	6.20
06	6.25	7.45
07	7.50	8.70
08	8.75	9.95
09	10.00	10.50
10	11.25	11.45
---	---	---
20	23.75	24.95

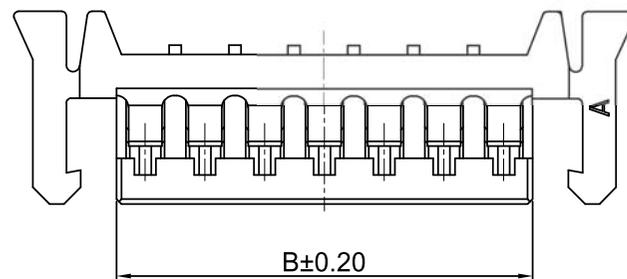

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	KB914-XXHL2A
2018-10-23	A		KB914-XXHL2A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	Checked 審定	PART NO. 料號
						APPROVED 核准	DWG NO. 圖號
							PE181006A

UNIT 單位	mm	PRODUCT NAME 產品名稱	PH1.25mm Wire To Board Housing With Lock
------------	----	----------------------	---

