


DRAWING FOR CUSTOMER

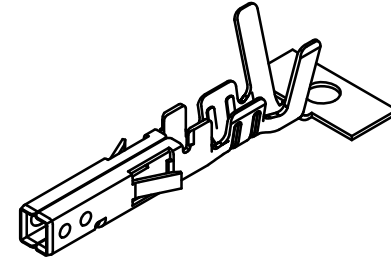

■SPEC.:

- Rated Voltage:250V AC,DC
- Rated Current:7A AC,DC
- Withstand Voltage:1500V AC/minute
- Insulation Resistance:1000MΩ min
- Contant Resistance:15mΩ Max.
- Temperature Range:-25°C~+85°C

■Terminal:

- Material:T-Brass,TP-Phosphor Bronze
- Finish: Tin-plated,over Nickel
- Applicable wire:AWG#16~20
- QTY.:4KPCS/Reel



KB970-XXTB5A

1:All plated
2:Half plated


Plating
0: Tin-plat
1: Gold Flash
2: Gold Plat3u"
3: Gold Plat5u"
8: Gold Plat8u"

Version
Mold No.
A:Low Foot
B:High Foot
C:Middle Foot


Terminal(Brass)

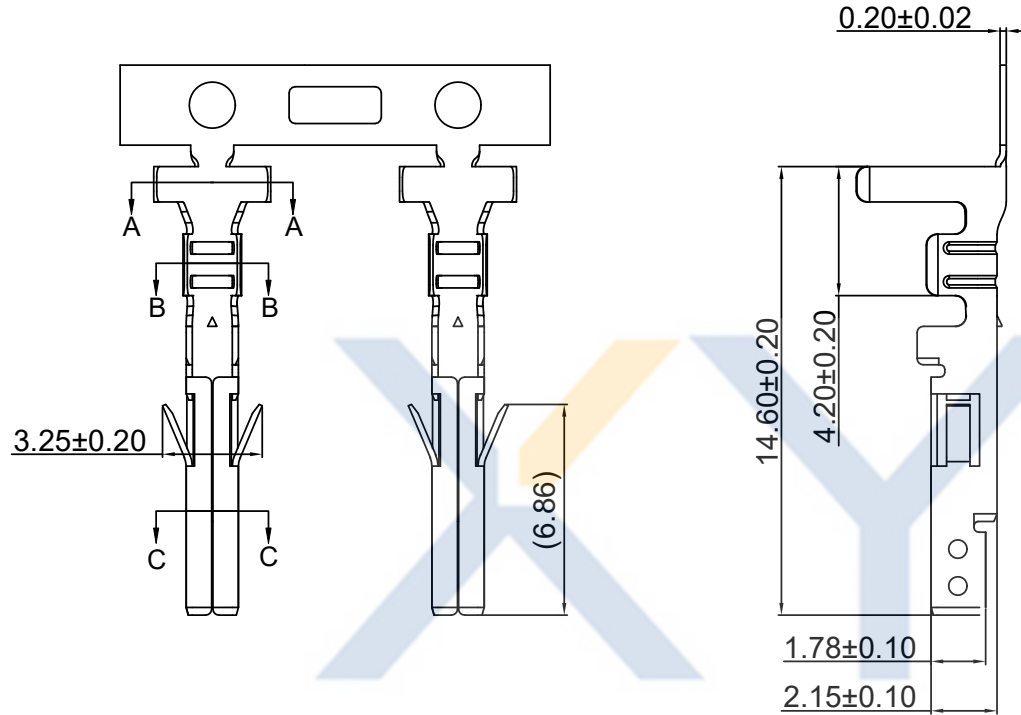

Section:C-C



Section:B-B



Section:A-A

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

					TOLERANCE 公差	DRAWING 设计者	Devin	KB970-XXTB5A			
2013-07-30	A	CHANGE HISTORY 变更历史	KB970-XXTB5A	Devin	.X=±0.30	CHECKED 审查	Thomas	PART NO. 料号			
DATE 日期	VER 版本				CHANGED NAME 修改后料号	DRAWING 变更者	.XX=±0.20	APPROVED 核准	William	DWG NO. 图号	PE191211A
							.XXX=±0.10				

UNIT 单位	mm	PRODUCT NAME 产品名称	5557 PH4.2mm High Foot Terminal-Female
------------	----	----------------------	---