

DRAWING FOR CUSTOMER


■SPEC.:

- Voltage Rating:250V AC/DC
- Current Rating:3A AC/DC
- Dielectric Strength :1500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25°C to+85°C

■Material:

- Insulator:PBT UL94V-0
- Color:Black


KB9510-D XX H T 6 X

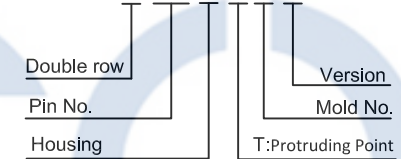


2*25PIN 双凸点
KB9510-D50HT6B



2*30PIN 双凸点
KB9510-D60HT6B

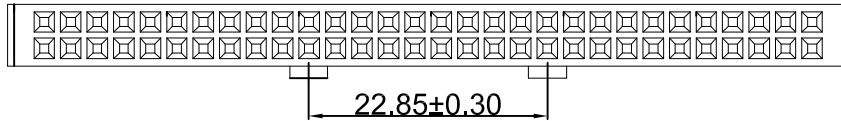

2*5~2*25PIN 单凸点
KB9510-DXXHT6A

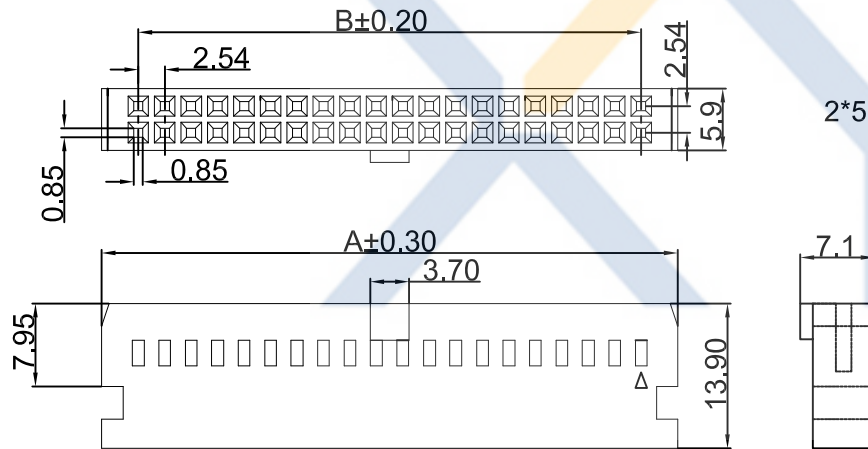

Poles	Dimensions(mm)	
	A	B
2*05	17.26	10.16
2*07	22.34	15.24
2*08	24.88	17.78
2*10	29.96	22.86
2*13	37.58	30.48
2*15	42.66	35.56
2*17	47.74	40.64
2*20	55.36	48.26
2*25	68.06	60.96
2*30	80.76	73.66

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB9510-DXXHT6X
2015-06-10	A		KB9510-DXXHT6X	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號 PE191201A

UNIT 單位	mm	PRODUCT NAME 產品名稱	PH2.54mm Wire To Board Dual Row Protruding Point Housing