

# DRAWING FOR CUSTOMER


■SPEC.:

- Rated Voltage:30V AC,DC
- Rated Current:0.2A AC,DC(AWG #36)  
0.3A AC,DC (AWG #34)
- Withstand Voltage:200V AC/minute
- Contact Resistance:30mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃






■Material:

- Insulator:LCP, UL94V-0
- Contact:Phosphor Bronze
- Applicable wire:AWG#36;AWG34
- Insulation O.D:Ø0.32±0.02mm(AWG#34)  
Ø0.29mm(AWG#26)

KB601-XX H E XX T 5 A

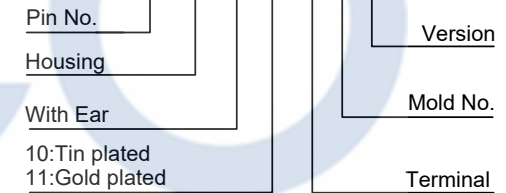

Poles	Dimensions(mm)				
	A	B	C	D	E
02	1.36	1.80	1.65	0.60	3.00
04	2.56	3.00	2.85	1.80	4.20
05	3.16	3.60	3.45	2.40	4.80
06	3.76	4.20	4.05	3.00	5.40
07	4.36	4.80	4.65	3.60	6.00
08	4.96	5.40	5.25	4.20	6.60
10	6.16	6.60	6.45	5.40	7.80
12	7.36	7.80	7.65	6.60	9.00
14	8.56	9.00	8.85	7.80	10.20
16	9.76	10.20	10.05	9.00	11.40

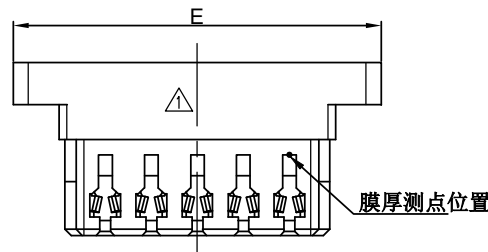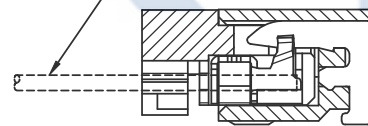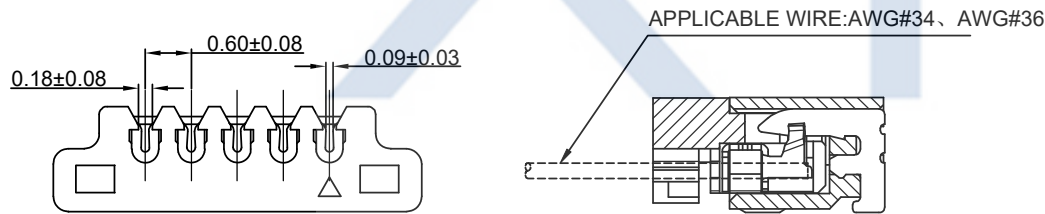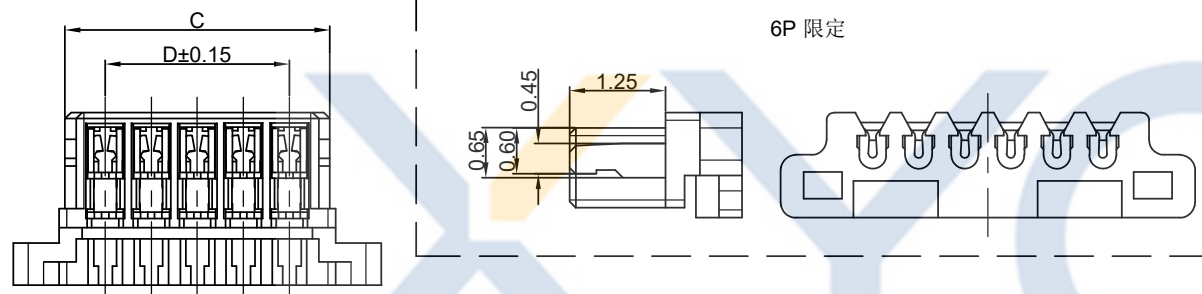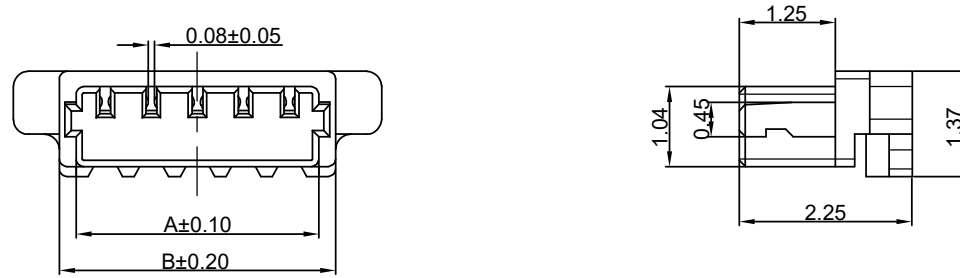

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2015-04-12		A	KB601-XXHEXXT5A		Devin	KB601-XXHEXXT5A		UNIT		PRODUCT NAME		XSR PH0.6mm Wire To Board Connector Ear
DATE	VER	CHANGE HISTORY	CHANGED NAME	DRAWING	TOLERANCE 公差	DRAWING 設計者	PART NO. 料號	mm	XSR PH0.6mm Wire To Board Connector Ear			
日期	版本	變更歷史	修改後料號	變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	Thomas	DWG NO. 圖號	PE211103A	產品名稱			