



DRAWING FOR CUSTOMER

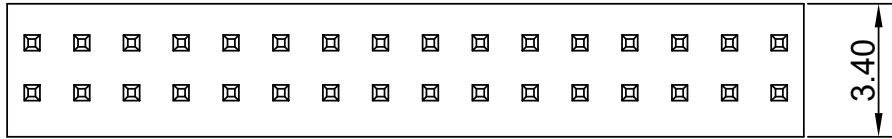

- SPEC.:
- Rated Current:1.0A AC,DC
- Withstand Voltage:300V AC/minute
- Insulation Resistance:1000MΩ min
- Contact Resistance: 20mΩ Max
- Temperature Range:-40℃~+105℃
- Notes:
- Insulator Material:PA6T UL 94V-0
- Contact Material:Brass




KBP12703-D XX X D V 5 A

Double row
Pin No.

Version
Mold No.

包装方式:
T:TUBE (管装)
R:REEL (卷装)
P: PE (袋装)

R:Riht Angle
V:Vertical
S:SMT
D:DIP

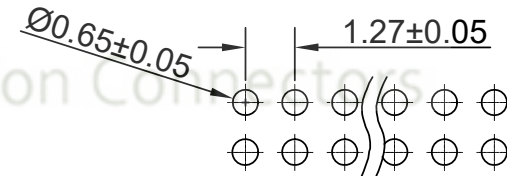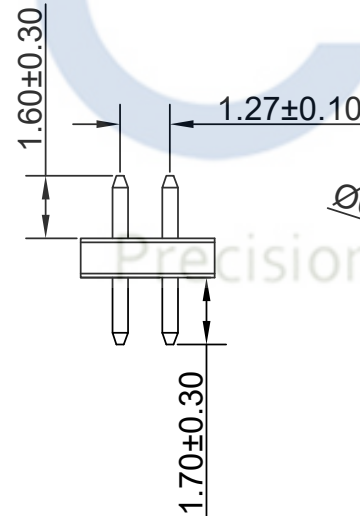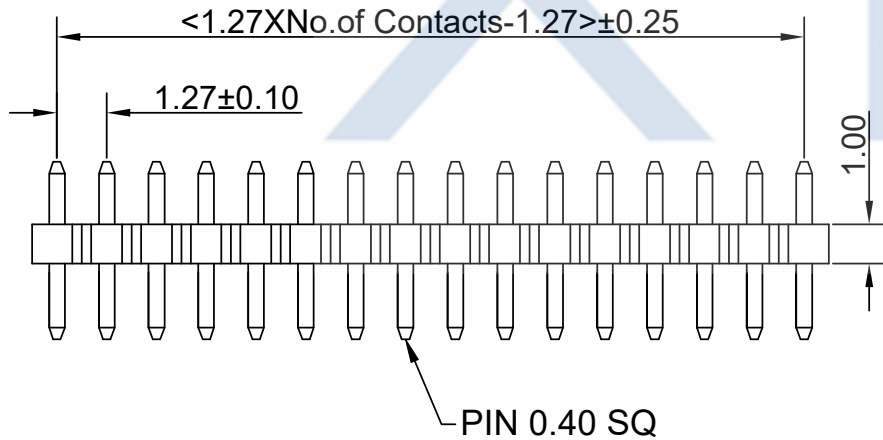

Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)

2014-09-08		A	KBP12703-DXXXDV5A		Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KBP12703-DXXXDV5A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位
							APPROVED 核准	William	DWG NO. 圖號	mm
									PE1906004A	PRODUCT NAME 產品名稱

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

PH:1.27 PIN HEADER Double Row	
DIP Vertical Type Base 1.00H	