
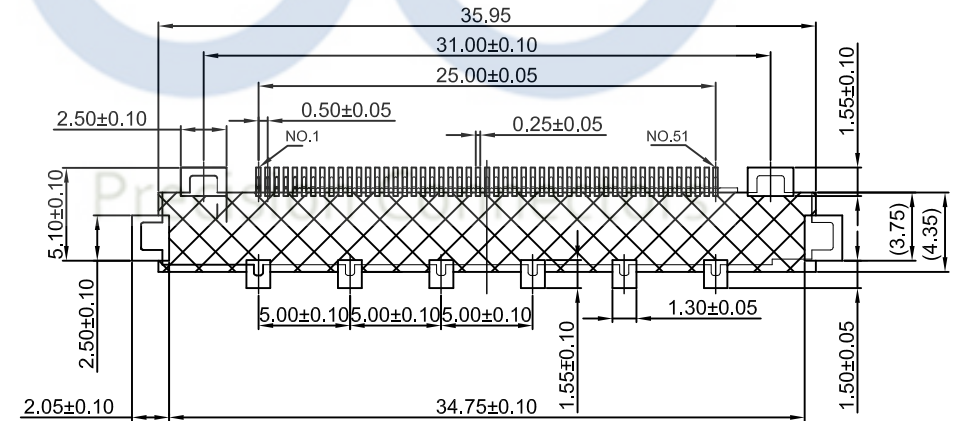
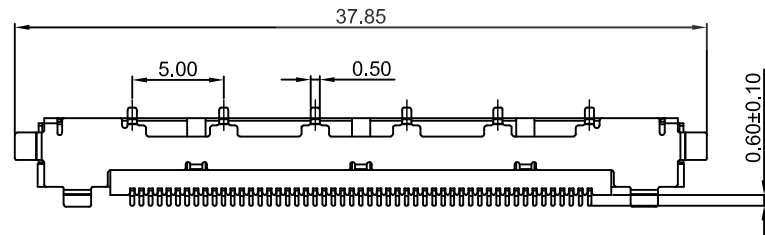

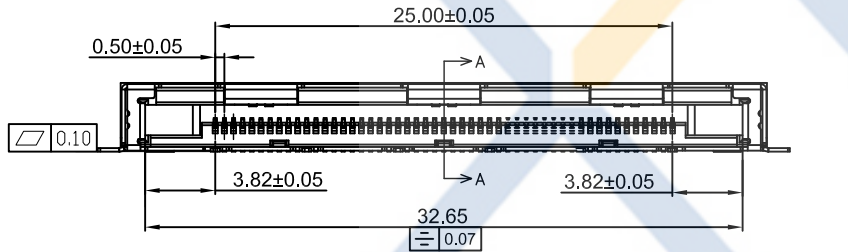
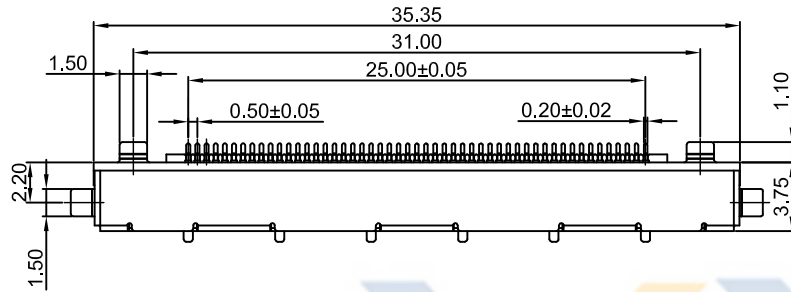


# DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:200V AC,DC
  - Rated Current:0.8A AC,DC
  - Withstand Voltage:500V AC/minute
  - Contact Resistance:40mΩ max
  - Insulation Resistance:100MΩ min
  - Temperature Range:-40℃~+80℃

- Material:
- Insulator: LCP HF UL 94V-0,Black
  - Contact Pin:Copper Alloy  
Finish:Gold-Plated,over Nickel
  - Shell:Stainless steel  
Finish:Matte Tin-Plated,over Nickel
- Q'TY: 1000PCS/Reel

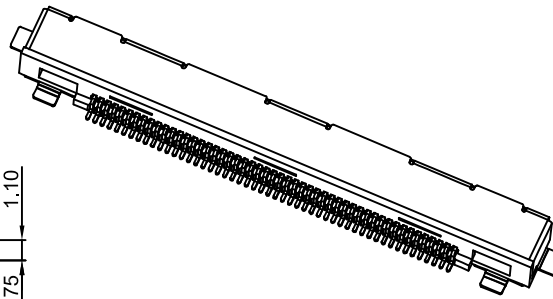

**KB904-51 XSR3A**

Pin No.      Version  
 T: TUBE (管装)      Mold No.  
 R: REEL (卷装)      R: Right Angle  
 P: P E (袋装)      V: Vertical  
    S: SMT  
    D: DIP

APPLICABLE P.C.B DIMENSION

**XYCO** 东莞市轩业电子科技有限公司  
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-12-15		A			TOLERANCE 公差	DRAWING 設計者	Devin	KB904-51XSR3A		UNIT 單位	mm	PRODUCT NAME 產品名稱	FI-RE PH0.5 Wire to board Right Angle SMT Wafer
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X±±0.30 .XX±±0.20 .XXX±±0.10	CHECKED 審查	Thomas	PART NO. 料號					
1	2	3	4	5	6	7	8	9	10	11	12	13	14