
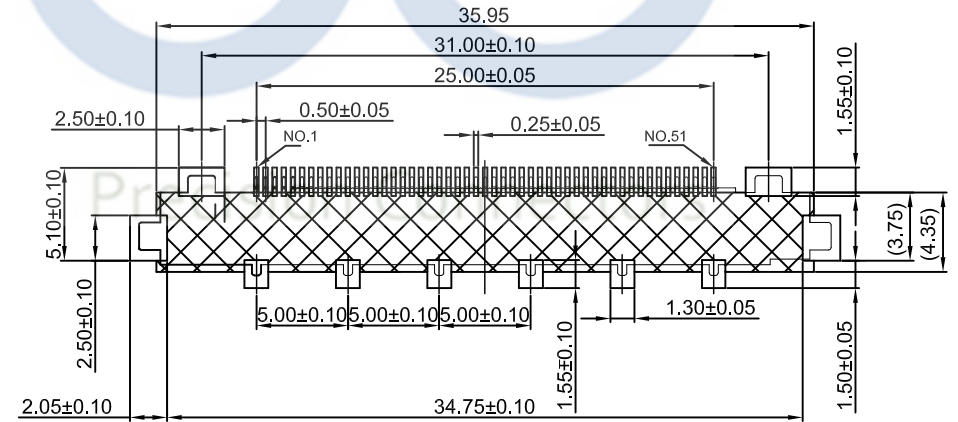
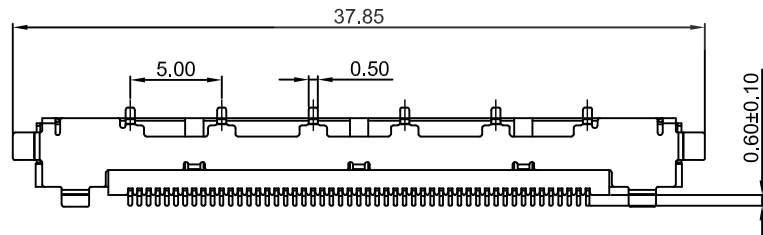

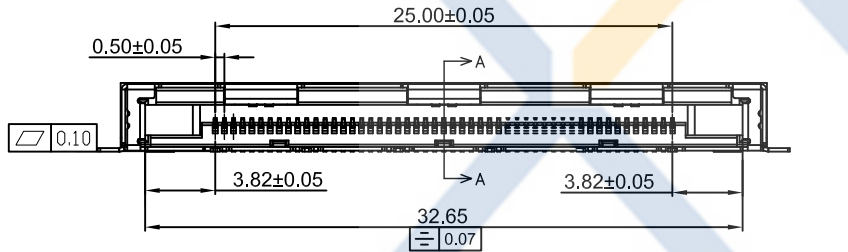
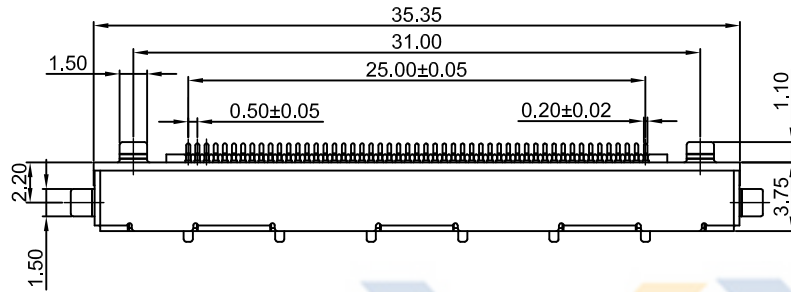


DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:200V AC,DC
 - Rated Current:0.8A AC,DC
 - Withstand Voltage:500V AC/minute
 - Contact Resistance:40mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-40℃~+80℃

- Material:
- Insulator: LCP HF UL 94V-0,Black
 - Contact Pin:Copper Alloy
Finish:Gold-Plated,over Nickel
 - Shell:Stainless steel
Finish:Matte Tin-Plated,over Nickel
- Q'TY: 1000PCS/Reel

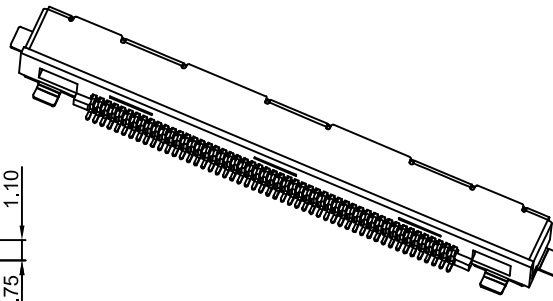

KB904-51 XSR3A

Pin No. Version
 T: TUBE (管装) Mold No.
 R: REEL (卷装) R: Right Angle
 P: P E (袋装) V: Vertical
 S: SMT
 D: DIP

APPLICABLE P.C.B DIMENSION

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-12-15		A	KB904-51XSR3A		Devin	DRAWING 設計者 Devin		KB904-51XSR3A		UNIT 單位 mm	PRODUCT NAME 產品名稱	FI-RE PH0.5 Wire to board Right Angle SMT Wafer
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號				
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	APPROVED 核准	William	DWG NO. 圖號	PE1704005A			