

DRAWING FOR CUSTOMER




KB931-D XX H T 1 A - 2 X

D: Double row
 Pin No.
 Housing
 T: Protruding Point


XYCO
 Material
 Version
 Mold No.

- SPEC.:
- Voltage Rating:250V AC/DC
 - Current Rating:2A AC/DC
 - Dielectric Strength :500V AC/minute
 - Contact Resistance:20mΩ max.
 - Insulation Resistance:100MΩ min.
 - Temperature Range:-25°C to+85°C.

- Material:
- Insulator:PA66 UL94V-0;
 - Color:Black

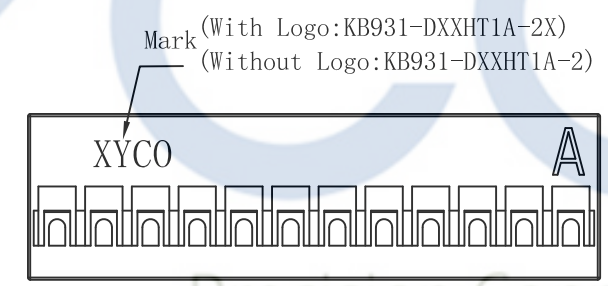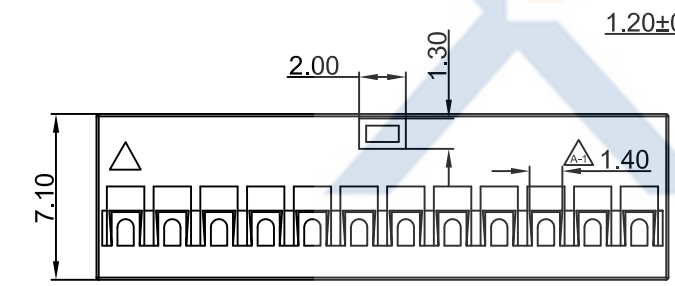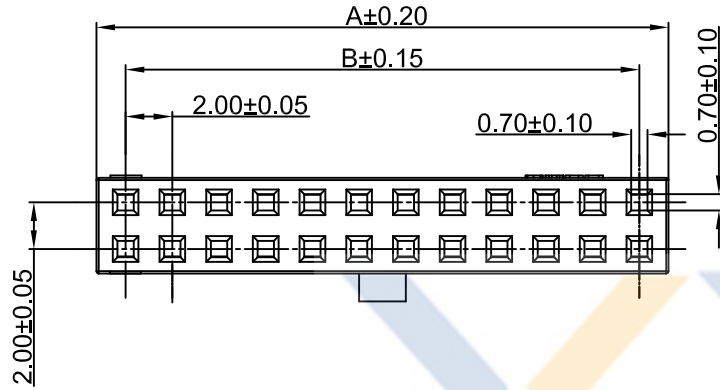

Poles	Dimensions(mm)	
	A	B
2X03	6.50	4.00
2X04	8.50	6.00
2X05	10.50	8.00
2X06	12.50	10.00
2X07	14.50	12.00
2X08	16.50	14.00
2X09	18.50	16.00
2X10	20.50	18.00
2X11	22.50	20.00
2X12	24.50	22.00
2X13	26.50	24.00
2X14	28.50	26.00
2X15	30.50	28.00
2X16	32.50	30.00
2X17	34.50	32.00
2X18	36.50	34.00
2X19	38.50	36.00
2X20	40.50	38.00
2X21	42.50	40.00
2X22	44.50	42.00
2X23	46.50	44.00
2X24	48.50	46.00
2X25	50.50	48.00

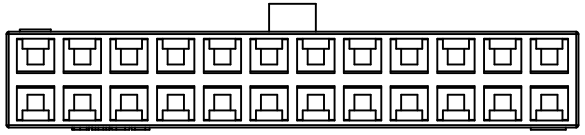

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2021-09-12	A-1	优化塑胶卡点		KB931-DXXHT1A-2X	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB931-DXXHT1A-2X
2013-05-16	A			KB931-DXXHT1A-2X	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史		CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號

UNIT 單位	mm	PRODUCT NAME 產品名稱	DP PH2.00mm Wire to Board Housing With Protruding Point