DRAWING FOR CUSTOMER

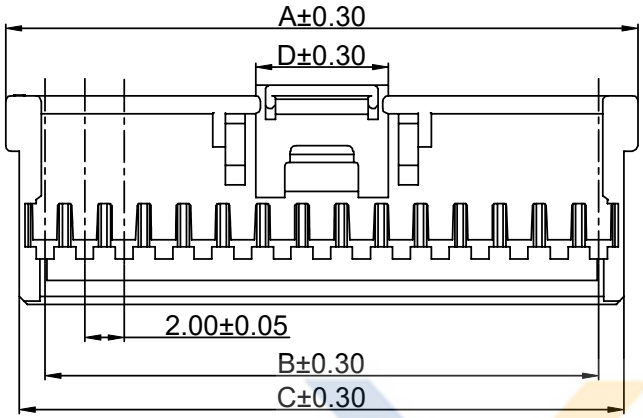



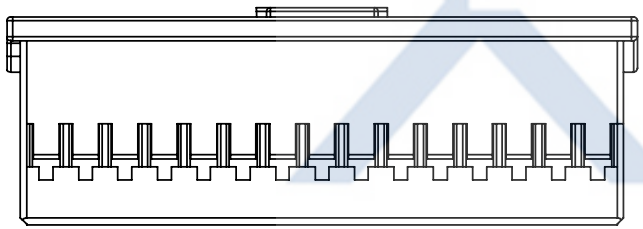



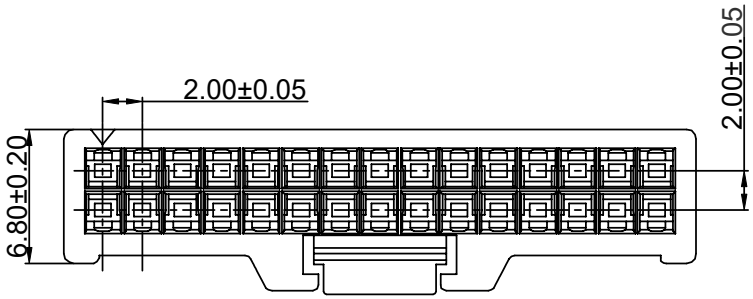

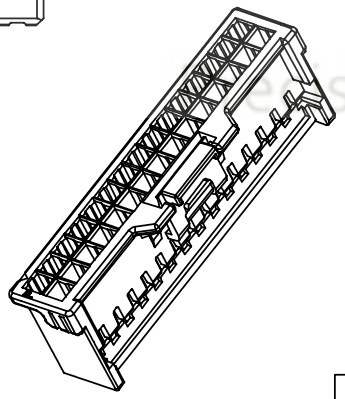

■SPEC.:
- ●Rated Voltage: 250V AC,DCm
- ●Rated Current: 2A AC,DC
- ●Withstand Voltage: 800V AC/minute
- ●Contact Resistance: 20mΩ (MAX.)
- ●Insulation Resistance: 1,000MΩ (MIN.)
- ●Temperature Range: -25°C~+85°C

■Material:
- ●Insulator:B1-PA66 UL94V-0
  Color:BGE-Beige;BK-Black;
  NAT-Natural

XY20002- D X X H L 2 A -XX -XX

- Double row
- Pin No.
- Housing
- With Lock
- Color
- Material
- Version
- Mold No.

Poles	Dimensions(mm)			
	A	B	C	D
2X05	12.00	8.00	10.60	5.25
2X06	14.00	10.00	12.60	6.65
2X07	16.00	12.00	14.60	6.65
2X08	18.00	14.00	16.60	6.65
2X09	20.00	16.00	18.60	6.65
2X10	22.00	18.00	20.60	6.65
2X11	24.00	20.00	22.60	6.65
2X12	26.00	22.00	24.60	6.65
2X13	28.00	24.00	26.60	6.65
2X14	30.00	26.00	28.60	6.65
2X15	32.00	28.00	30.60	6.65
2X16	34.00	30.00	32.60	6.65
2X17	36.00	32.00	34.60	6.65
2X18	38.00	34.00	36.60	6.65
2X19	40.00	36.00	38.60	6.65
2X20	42.00	38.00	40.60	6.65

XYCO Precision Connector

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2018-05-12	A		XY20002-DXXHL2A-XX-XX	Devin

TOLERANCE 公 差	DRAWING 設計者	Devin	XY20001-DXXHL2A-XX-XX
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
	APPROVED 核准	William	DWG NO. 圖號 PE180511A

UNIT 單位: mm

PRODUCT NAME 產品名稱: 501646 PH2.0mm Wire To Board Double row Housing With Lock