



DRAWING FOR CUSTOMER

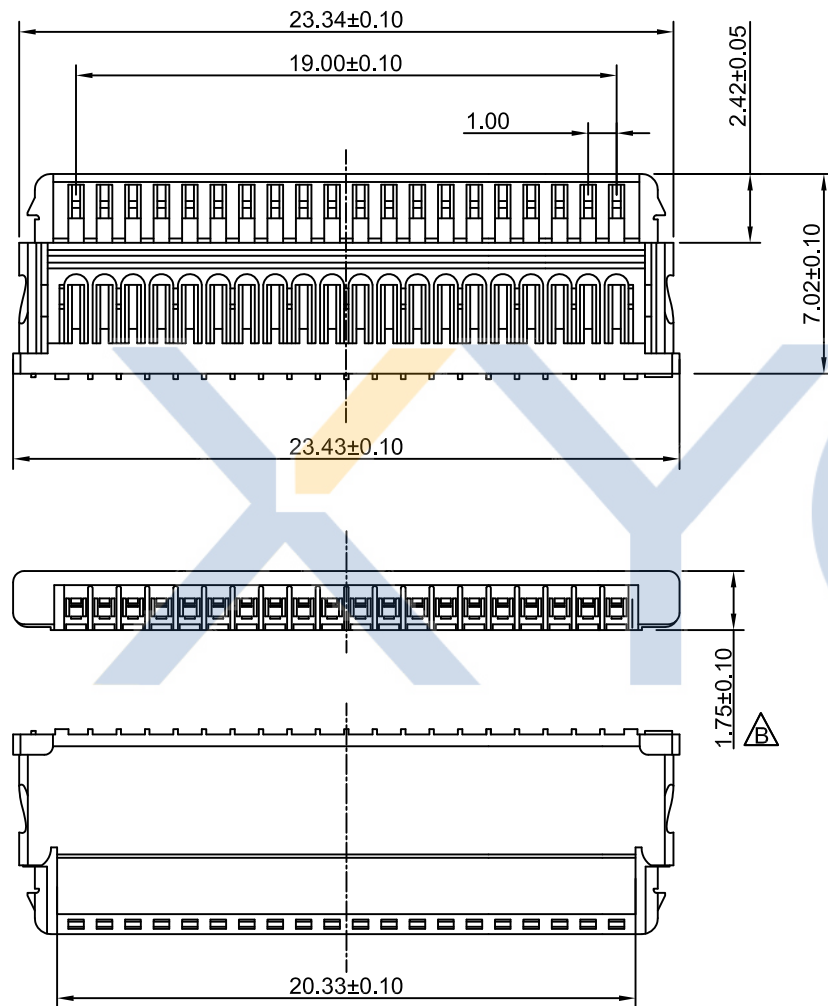

■SPEC.:

- Rated Voltage:200V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:40mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-40℃~+85℃
- Applicable wire:AWG#28~32
- QTY.:500PCS/Plate

■Notes:

- Housing:PA66 UL94V-0(white)
- Shell:Stainless Stell
- Latch:Stainless Stell

KB902-20 H X B

Pin No.

Version

Housing

Mold No.

Precision Connectors

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2014-06-04	B	housing彈片厚度縮小 $\triangle B$	KB902-20H1B	譚火秦	TOLERANCE 公差	DRAWING 設計者	譚火秦	KB902-20H1B	
2013-11-25	A		KB902-20H1A	譚火秦	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	彭太坤	PART NO. 料號	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	譚宏	DWG NO. 圖號	PE2109B

UNIT 單位	mm	PRODUCT NAME 產品名稱	FI-X PH1.00mm Wire To Board Housing
------------	----	----------------------	--