


DRAWING FOR CUSTOMER

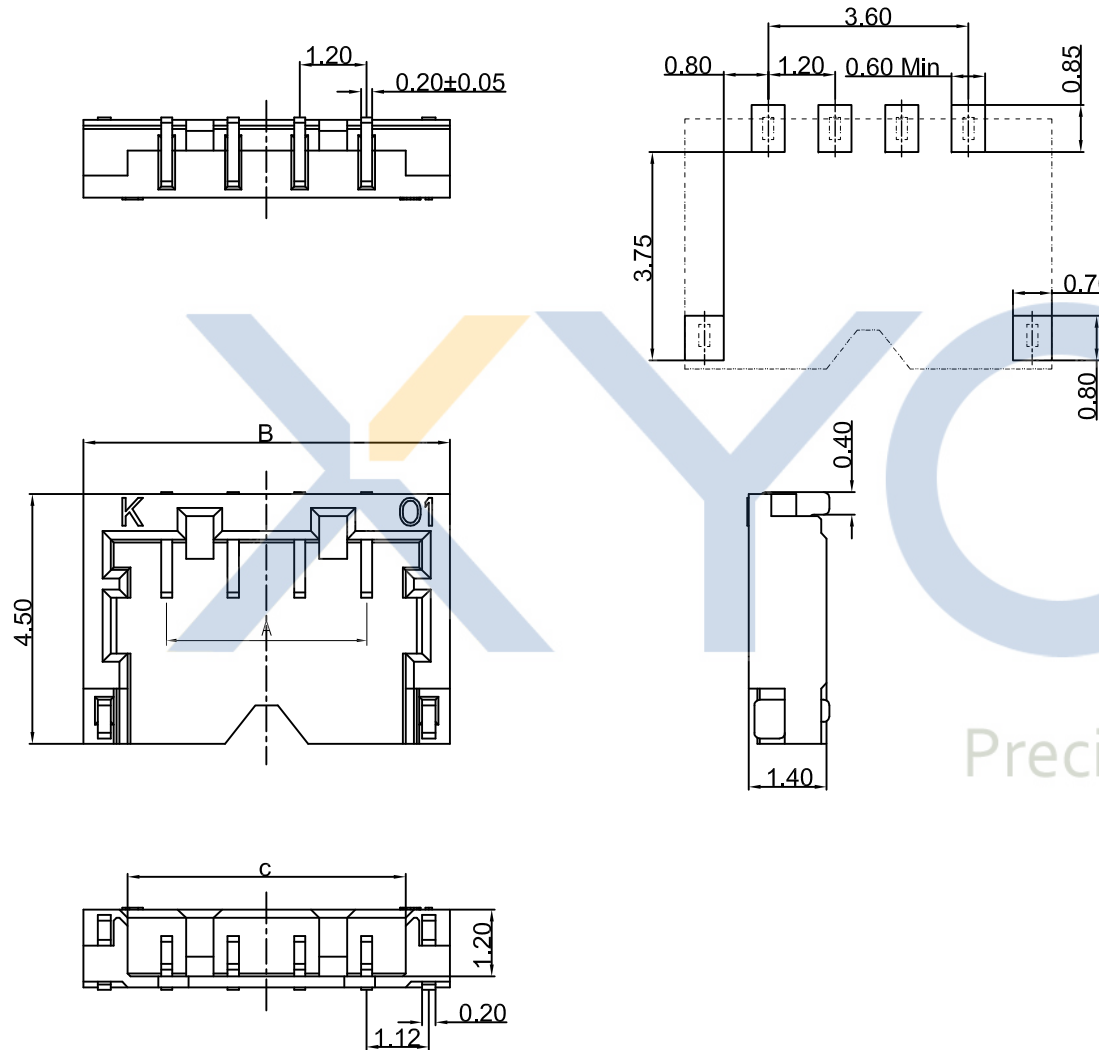

- SPEC.:
- Rated Voltage:50V AC,DC
- Rated Current:1.5A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃
- Wafer
- Insulator:PA9T UL 94V-0
- Contact:Phosphor Bronze
- Fitting Nait:Brass
- Plating:
- Contact:Gold Flash plated
- Fitting Nait:Tin Plated

KB1202- XX X S R X A

Pin No.

T:TUBE 管裝
R:REEL 卷裝
P:PE 袋裝

Version

Mold No.
R:Right angle
V:Verical

S:SMT
D:DIP

Precision Connectors

Poles	Dimensions		
	A	B	C
2	1.20	4.30	2.64
3	2.40	5.50	3.84
4	3.60	6.70	5.04
5	4.80	7.90	6.24
6	6.00	9.10	7.44
7	7.20	10.30	8.64

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-07-17		A			KB1202-XXXXSRXA	刘造强	TOLERANCE 公差	DRAWING 設計者	刘造强	KB1202-XXXXSRXA		UNIT 單位		mm	PRODUCT NAME 產品名稱	JST ACHSS 1.2mm Wire To Board SMT Right Angle WAFER
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者			.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	杨峰	PART NO. 料號	DWG NO. 圖號	PE1808008A	mm			
								APPROVED 核准	穆良轩				mm			