





DRAWING FOR CUSTOMER

KB911-XXH3A

Pin No. Version
Housing Mold No.

- SPEC.:
- Rated Voltage:150V AC,DC
 - Rated Current:1A AC,DC
 - Withstand Voltage:300V AC/minute
 - Contact Resistance:30mΩ max
 - Insulation Resistance:500MΩ min
 - Temperature Range:-25℃~+85℃

- Material:
- Insulator:PA66 UL94V-0
 - Color:Beige

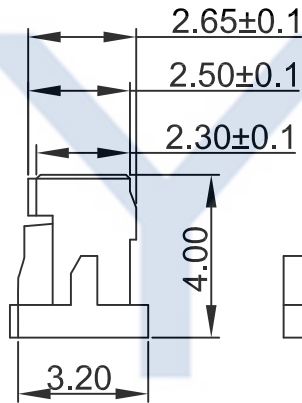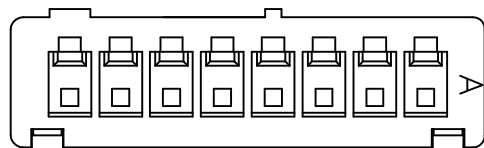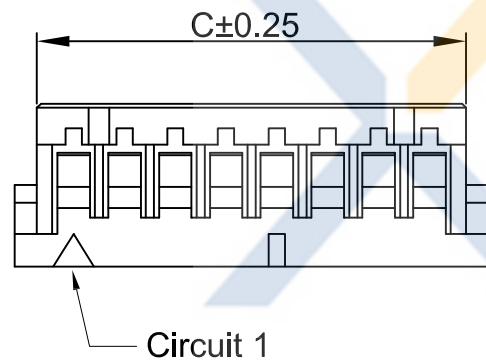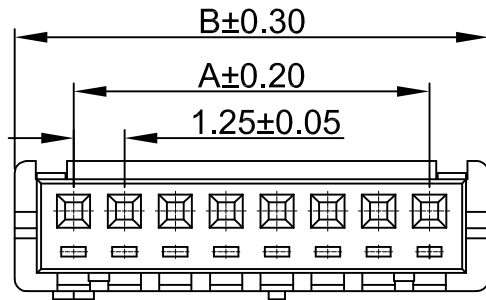

Poles	Dimensions(mm)		
	A	B	C
02	1.25	4.15	3.05
03	2.50	5.40	4.30
04	3.75	6.65	5.55
05	5.00	7.90	6.80
06	6.25	9.15	8.05
07	7.50	10.40	9.30
08	8.75	11.65	10.55
09	10.00	12.90	11.80
10	11.25	14.15	13.05
11	12.50	15.40	14.30
12	13.75	16.65	15.55
13	15.00	17.90	16.80
14	16.25	19.15	18.05
15	17.50	20.40	19.30

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

				TOLERANCE 公差	DRAWING 設計者	Devin	KB911-XXH3A			
2013-09-23	A	CHANGE HISTORY 變更歷史	KB911-XXH3A	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號			
DATE 日期	VER 版本				DRAWING 變更者	APPROVED 核准	William	DWG NO. 圖號	PE2801A	UNIT 單位
1	2				3	4	5	6	mm	PRODUCT NAME 產品名稱

DF13 PH1.25mm Wire To Board Housing
--