



DRAWING FOR CUSTOMER

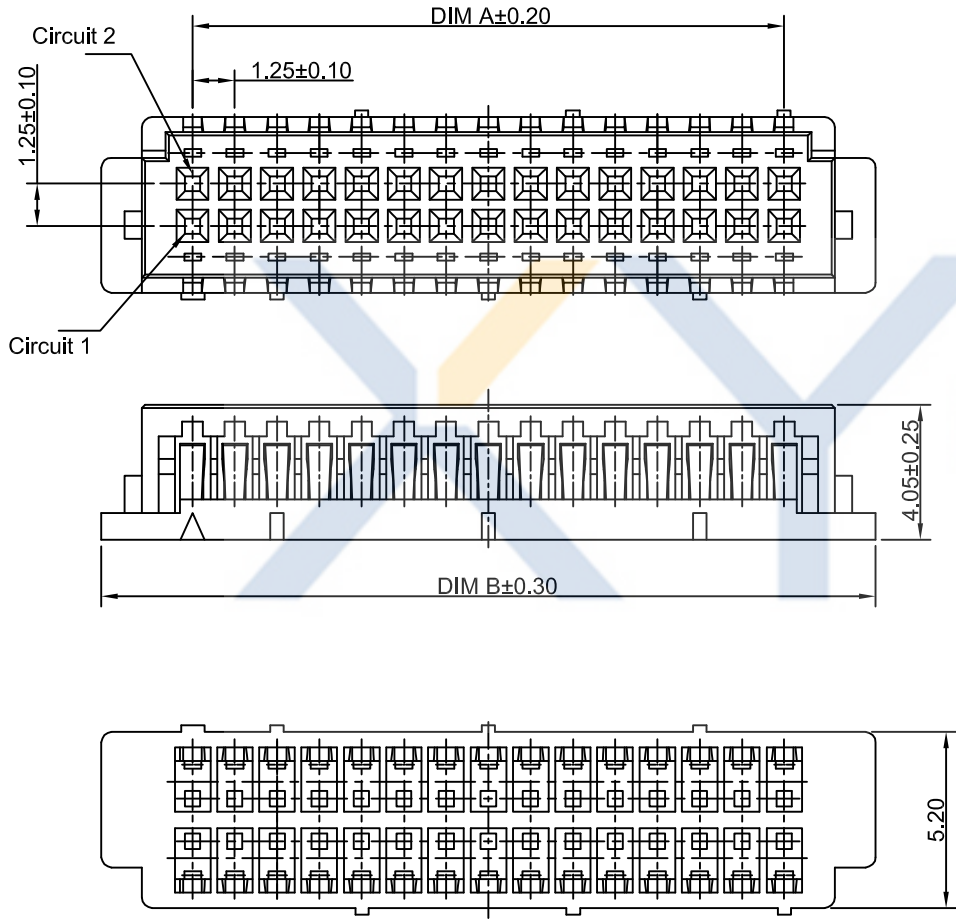

- SPEC.:
- Rated Voltage:150V AC,DC
 - Rated Current:1A AC,DC
 - Withstand Voltage:300V AC/minute
 - Contact Resistance:30mΩ max
 - Insulation Resistance:500MΩ min
 - Temperature Range:-25℃~+85℃
- Material:
- Insulator:PA66 UL94V-0



KB911-D X X H 2 A

Double row
Pin No.
Housing

Version
Mold No.

Precision Connectors

Poles	Dimensions(mm)	
	A	B
2X05	5.00	10.40
2X10	11.25	16.65
2X15	17.50	22.90
2X20	23.75	29.15

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2013-06-21	A		KB911-DXXH2A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB911-DXXH2A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位
						APPROVED 核准	William	DWG NO. 圖號	mm
1	2	3	4	5	6	7	8	9	

PRODUCT NAME 產品名稱	DF13 PH1.25mm Wire To Board Double row Housing
----------------------	---