
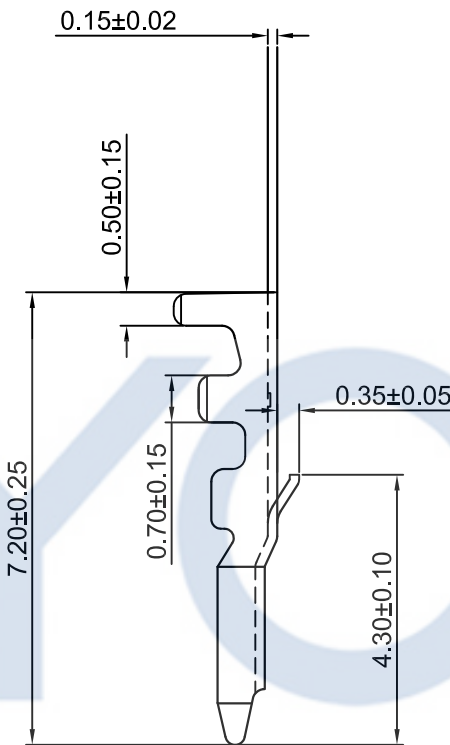


DRAWING FOR CUSTOMER

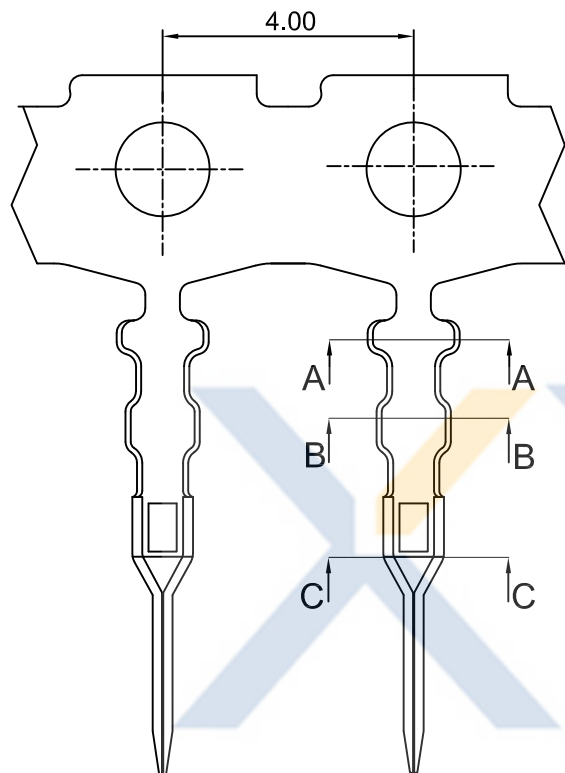

■SPEC.:

- Rated Voltage:125V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃
- Applicable wire:AWG#28~32

■Terminal

- Material:Phosphor Bronze C5191
- Finish:Tin-plated;over Nickel-plated.
- QTY.:15KPCS/Reel

KB915-X X T 1 A-F1

1:All plated
2:Half plated


Plating
0:Sn-plated
1:Au-plated 1u"
2:Au-plated 3u"
3:Au-plated 5u"

Wire To Wire


Version

Mold No.


Terminal



SECTION A-A



SECTION B-B



SECTION C-C

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者 CHECKED 審查 APPROVED 核准	Devin Thomas William	KB915-XXT1A-F1
2014-07-28	A		KB915-XXT1A-F1	Devin				PART NO. 料號
								DWG NO. 圖號
								PE3107A

UNIT 單位	mm	PRODUCT NAME 產品名稱	51047 PH1.25mm Wire To Wire Terminal
------------	----	----------------------	--------------------------------------