




# DRAWING FOR CUSTOMER


- SPEC.:
- Rated Voltage:250V AC,DC
  - Rated Current:3A AC,DC
  - Withstand Voltage:800V AC/minute
  - Contact Resistance:20mΩ max
  - Insulation Resistance:1000MΩ min
  - Temperature Range:-25℃~+85℃

- Material:
- Insulator(A):PA6T UL94V-0
  - Contact Pin(B): Brass  
Finish: Tin-plated;over Nickel
  - Solder Tab(C):Brass  
Finish: Tin-plated,over Nickel




Pin No.	Version
T:TUBE (管裝)	Mold No.
R:REEL (卷裝)	R:Right Angle
P:P E (袋裝)	V:Vertical
D:DIP	
S:SMT	

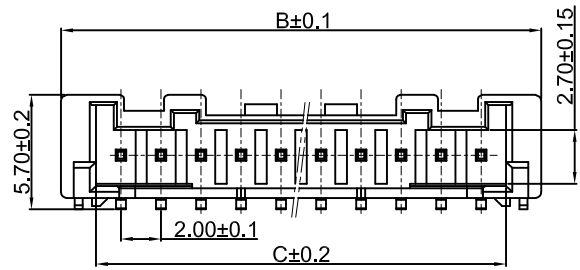


注：六孔及以下无卡槽



注：十孔及以上双卡扣

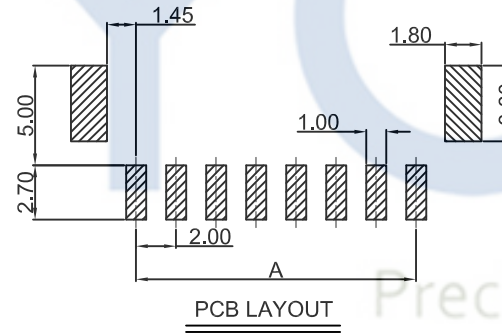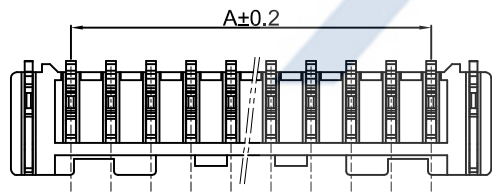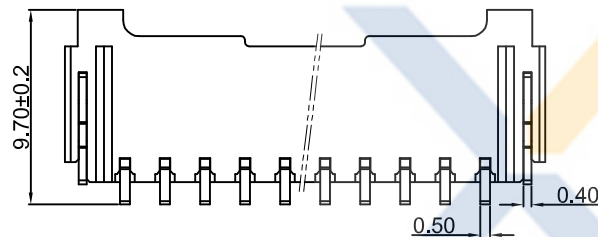

Poles	Dimensions (mm)		
	A	B	C
02	2.00	8.00	4.55
03	4.00	10.00	6.55
04	6.00	12.00	8.55
05	8.00	14.00	10.55
06	10.00	16.00	12.55
07	12.00	18.00	14.55
08	14.00	20.00	16.55
09	16.00	22.00	18.55
10	18.00	24.00	20.55
11	20.00	26.00	22.55
12	22.00	28.00	24.55
13	24.00	30.00	26.55
14	26.00	32.00	28.55
15	28.00	34.00	30.55

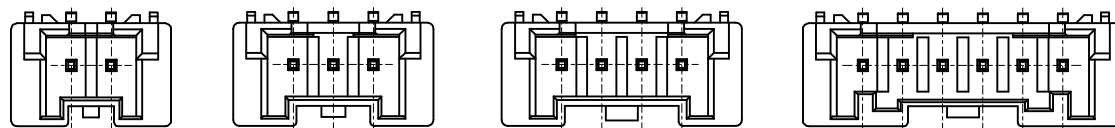

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-08-12	A		KB934-XXXSR6A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB934-XXXSR6A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位
1	2	3	4	5	6	7	8	9	10
1	2	3	4	5	6	7	8	9	10

DWG NO. 圖號	PE1903012A	mm	PRODUCT NAME 產品名稱	PA PH2.0mm Wire To Board SMT Right Angle Wafer
------------	------------	----	-------------------	---