DRAWING FOR CUSTOMER

KB902-30 H L S 3 A

- Pin No.
- Housing
- With Lock
- Soldering
- Mold No.
- Version

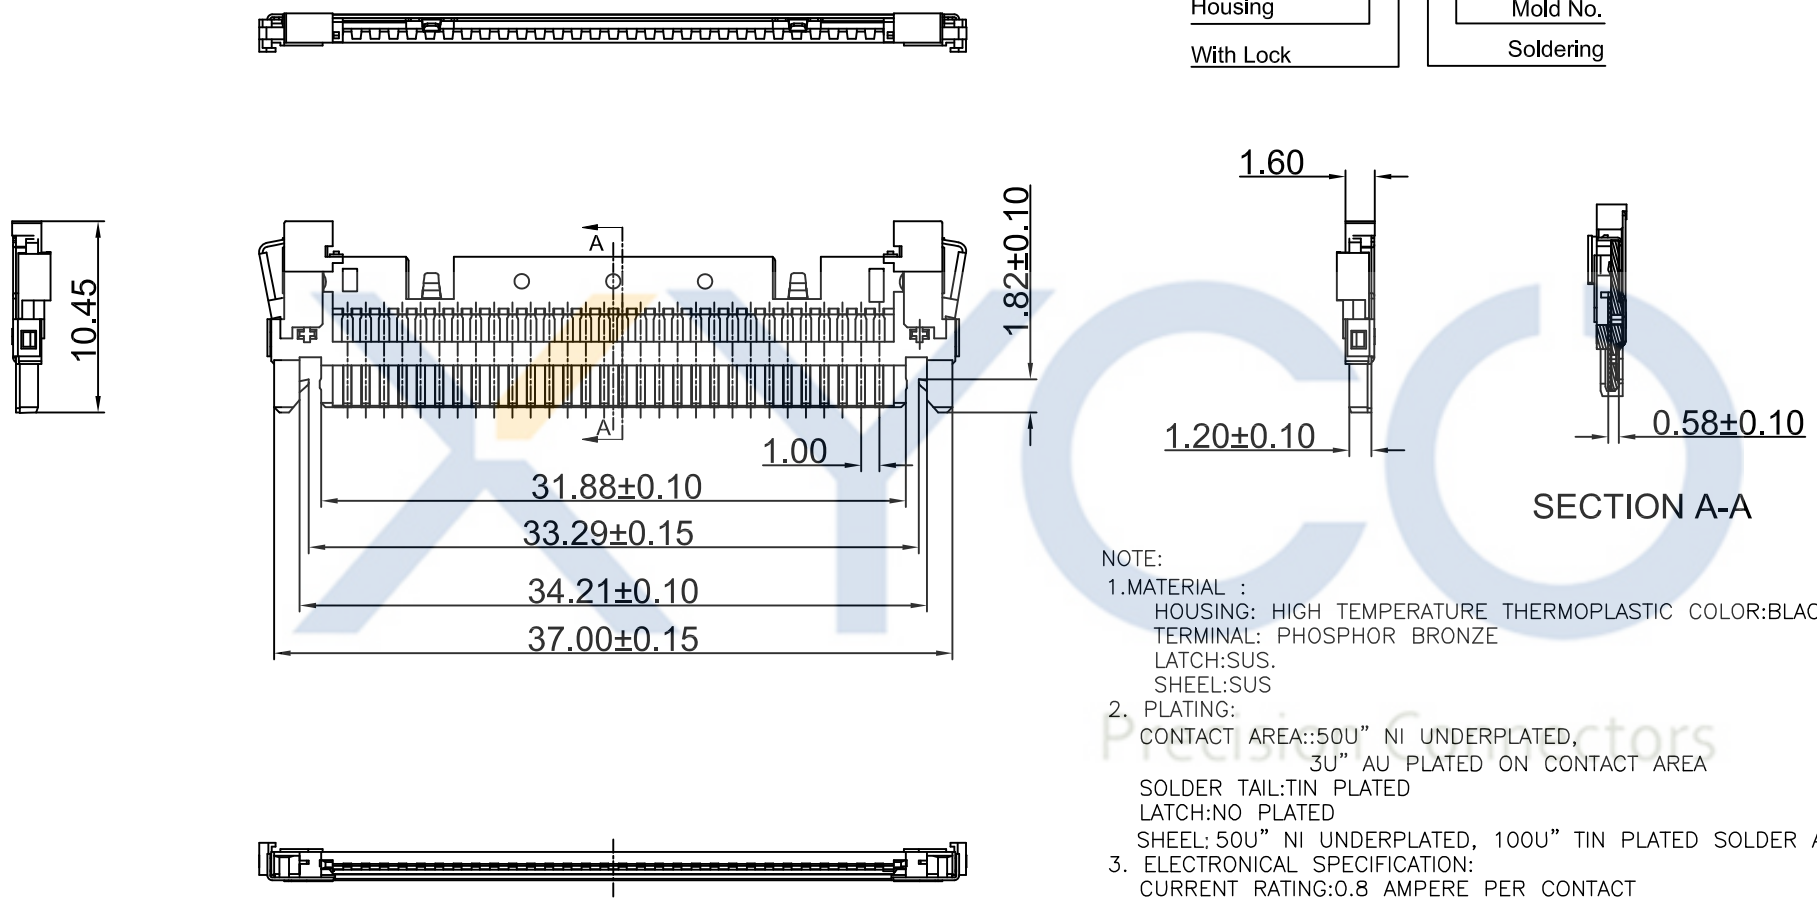

NOTE:

1.MATERIAL :
HOUSING: HIGH TEMPERATURE THERMOPLASTIC COLOR:BLACK
TERMINAL: PHOSPHOR BRONZE
LATCH:SUS.
SHEEL:SUS

2. PLATING:
CONTACT AREA::50U" NI UNDERPLATED,
3U" AU PLATED ON CONTACT AREA
SOLDER TAIL:TIN PLATED
LATCH:NO PLATED
SHEEL: 50U" NI UNDERPLATED, 100U" TIN PLATED SOLDER AREA

3. ELECTRONICAL SPECIFICATION:
CURRENT RATING:0.8 AMPERE PER CONTACT
CONTACT RESISTANCE:30 MILLIOHMS MAX.
INSULATION RESISTANCE:100 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE:300 VAC.
OPFRATING TFMPFRATURF·−40C°~+80C°

Precision Connectors

XYCO PRECISION CONNECTORS
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公 差	DRAWING 設計者	John	KB902-30HLS3A		UNIT 單位	mm	PRODUCT NAME 產品名稱	PH1.00mm COAXIALI CABLE CONNECTOR PLUG NORMAL WITH LOCK
2016-11-15	A		KB902-30HLS3A	John	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號					
						APPROVED 核准	William	DWG NO. 圖號	PE1709008A				