DRAWING FOR CUSTOMER

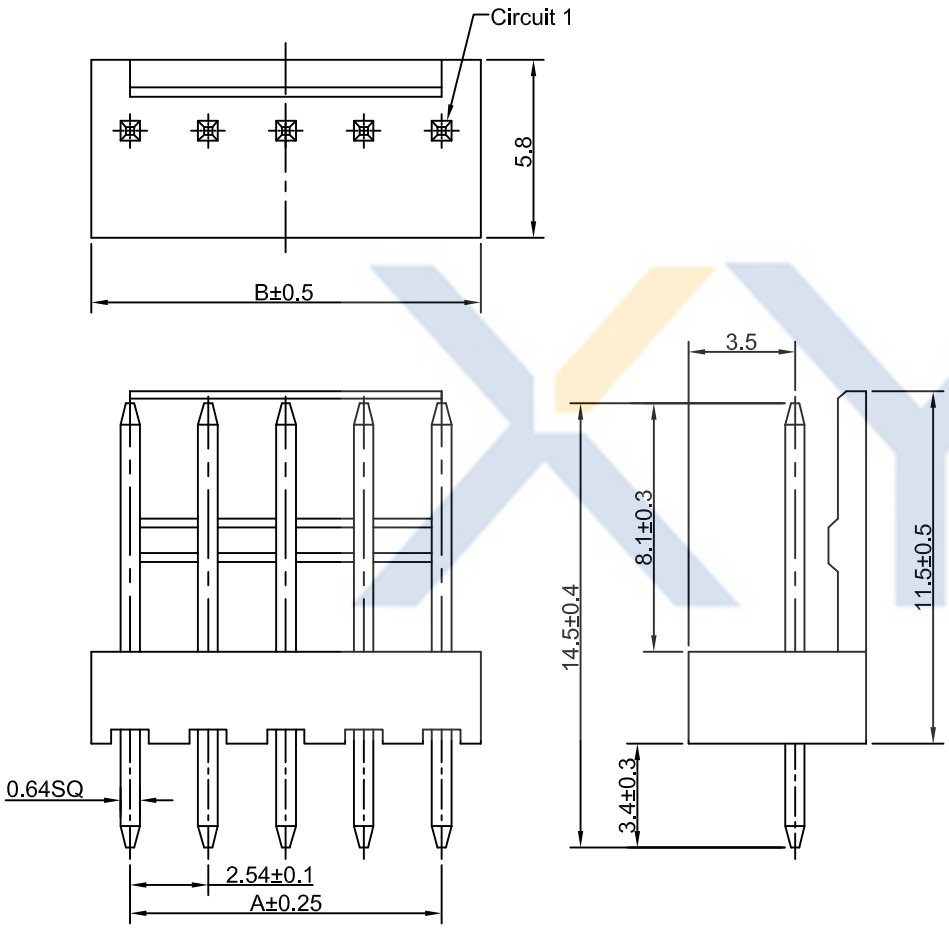

■SPEC.:
- ●Rated Voltage:250V AC,DC
- ●Rated Current:2.5A AC,DC
- ●Withstand Voltage:1500V AC/minute
- ●Contact Resistance:20mΩ max
- ●Insulation Resistance:1000MΩ min
- ●Temperature Range:-25℃~+85℃
- ●Material:NYLON UL94-V2
- ●Contact PIN:Brass

KB953- XX X D V 5 A

- Pin No.
- T:TUBE 管裝
- R:REEL卷裝
- P:PE 袋裝
- D:DIP
- S:SMT
- V:Vertical
- R:Right angle
- Mold No.
- Version

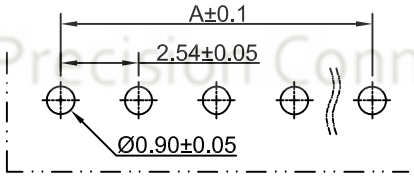

P.C.B LAYOUT

POLES	DIM.A	DIM.B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

XYCO Precision Connectors

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2015-06-21	A		KB953-XXXDV5A	John

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

DRAWING 設計者: John
CHECKED 審查: Thomas
APPROVED 核准: William

KB953-XXXDV5A

PART NO. 料號

DWG NO. 圖號: PE1707003A

UNIT 單位: mm

PRODUCT NAME 產品名稱: MOLEX 2510 Wire To Board Dip vertical Wafer

XYCO PRECISION CONNECTORS
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn