
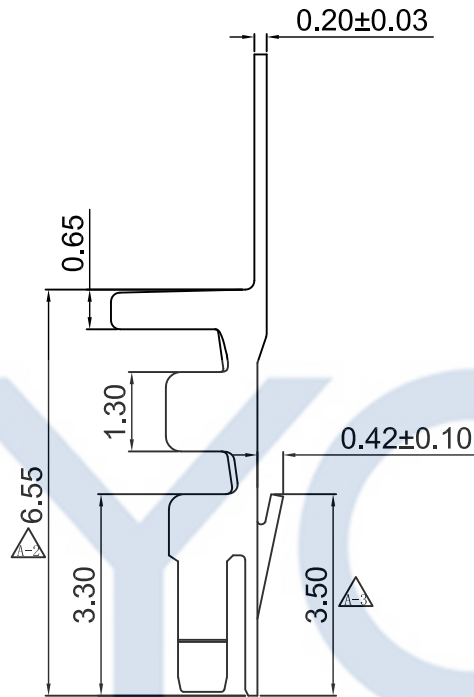


# DRAWING FOR CUSTOMER

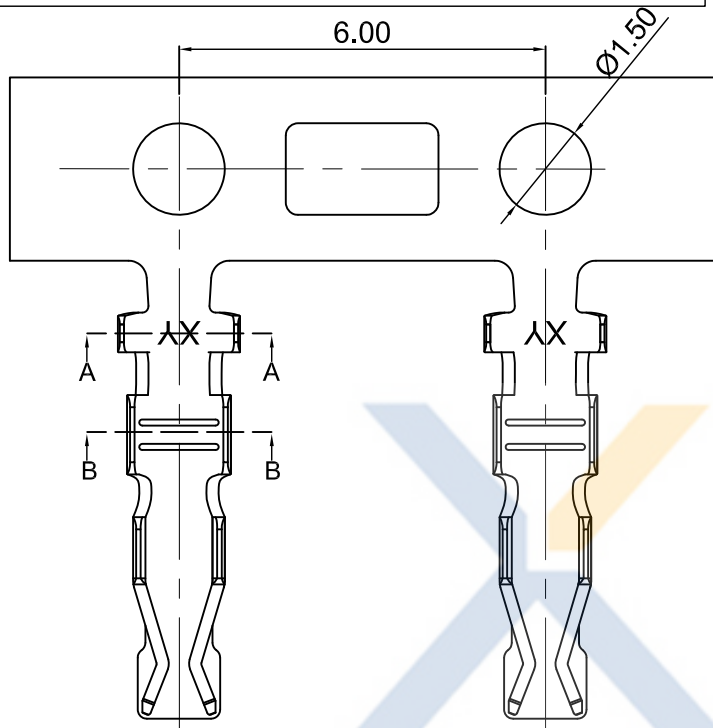

■SPEC.:

- Rated Voltage:250V AC,DC
- Rated Current:3A AC,DC
- Withstand Voltage:800V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃

■Terminal:

- Material:Phosphor Bronze C5191
- Finish:Tin-plated,over Nickel
- Applicable wire:AWG#26~30
- QTY.:10KPCS/Reel

KB939-XXT1A




1:All plated  
2:Half plated

Version

Plating  
0:Tin-plat  
1:Gold Flash  
2:Gold Plat3u"  
3:Gold Plat5u"

Mold No.

Terminal



2018-12-03	A-4	调整夹口尺寸管控	KB939-XXT1A	Devin
2017-07-21	A-3	卡点尺寸调整为L=3.50mm, 优化产品	KB939-XXT1A	Devin
2017-04-15	A-2	端子总长缩短0.20mm, L=6.55mm, 优化产品	KB939-XXT1A	Devin
2013-05-27	A	新版发行	KB939-XXT1A	Devin
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者

TOLERANCE 公差	DRAWING 設計者	Devin	KB939-XXT1A	
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	
	APPROVED 核准	William	DWG NO. 圖號	PE2108A

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

UNIT 單位	mm	PRODUCT NAME 產品名稱	PHC PH2.0mm Wire To Board Terminal
------------	----	----------------------	---------------------------------------