




DRAWING FOR CUSTOMER

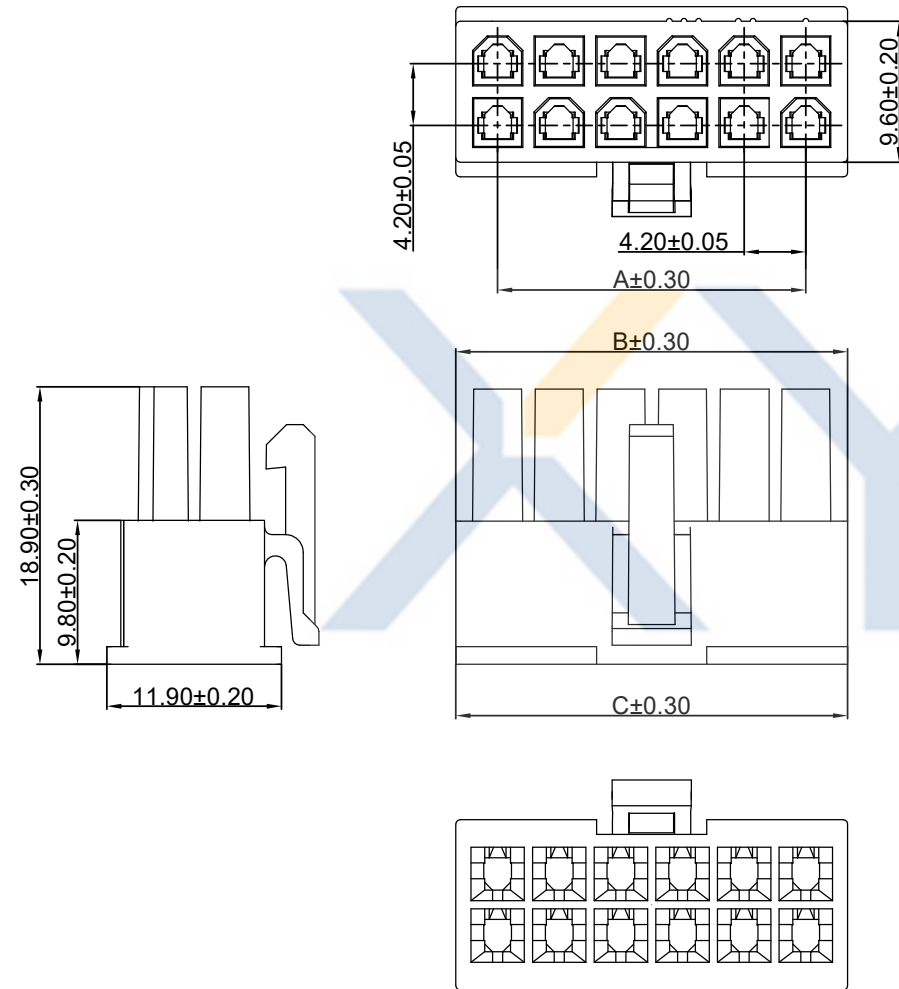

- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:7A AC,DC
 - Withstand Voltage:1500V AC/minute
 - Insulation Resistance:1000MΩ min
 - Contant Resistance:15mΩ Max.
 - Temperature Range:-25℃~+85℃

- Notes:
- Material:B3-PA66 UL94-V2 HF
 - Color:TP-Transparent

KB970- D XX H L 5 A-B3-TP



| Poles | Dimensions (mm) | | |
|-------|-----------------|-------|-------|
| | A | B | C |
| 2 | --- | 5.30 | 5.50 |
| 4 | 4.20 | 9.50 | 9.70 |
| 6 | 8.40 | 13.80 | 14.00 |
| 8 | 12.60 | 18.00 | 18.20 |
| 10 | 16.80 | 22.20 | 22.35 |
| 12 | 21.00 | 26.4 | 26.70 |
| 14 | 25.20 | 30.60 | 30.90 |
| 16 | 29.40 | 34.80 | 35.10 |
| 18 | 33.60 | 39.10 | 39.40 |
| 20 | 37.80 | 43.10 | 43.30 |
| 22 | 42.00 | 47.40 | 47.80 |
| 24 | 46.20 | 52.00 | 52.20 |

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

| | | | | | | | | | | | |
|------------|-----------|------------------------|----------------------|-------|-----------------------|----------------|-------------------------------------|----------------------|---------------|-------------|------------|
| 2013-07-30 | A | CHANGE HISTORY 变更历史 | KB970- DXXHL5A-B3-TP | Devin | TOLERANCE 公差 | DRAWING 设计者 | Devin | KB970- DXXHL5A-B3-TP | | | |
| DATE 日期 | VER 版本 | | | | CHANGED NAME 修改後料號 | DRAWING 变更者 | .X=±0.30 .XX=±0.20 .XXX=±0.10 | CHECKED 审查 | Thomas | PART NO. 料号 | UNIT 单位 |
| | | | | | | | APPROVED 核准 | William | DWG NO. 图号 | PE191208A | mm |

| | |
|----------------------|---|
| PRODUCT NAME 产品名称 | 5557 PH4.2mm Double Row Housing with lock-Male |
|----------------------|---|