

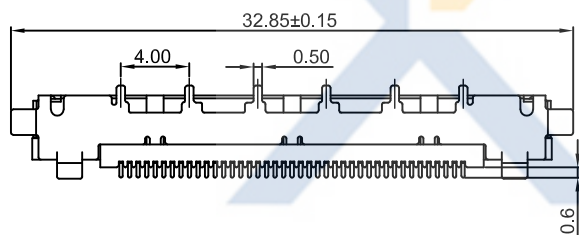

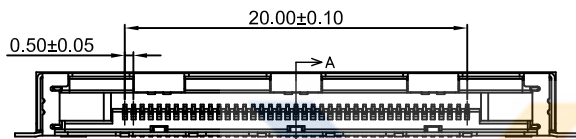



DRAWING FOR CUSTOMER

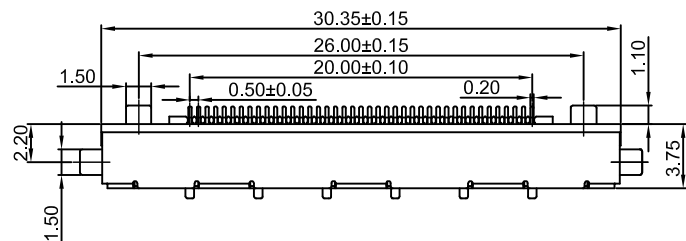

SECTION A-A
SCALE 2:1

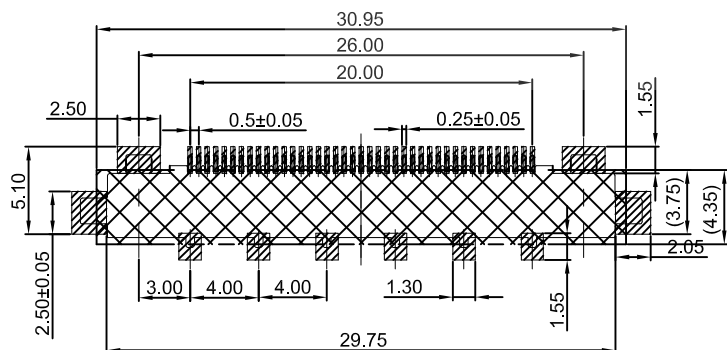

APPLICABLE P.C.B DIMENSION

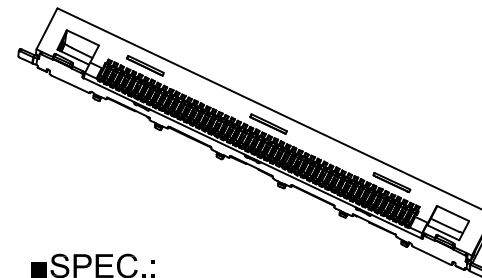

■SPEC.:

- Rated Voltage:200V AC,DC
- Rated Current:0.8A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:40mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-40℃~+80℃

■Material:

- Insulator: LCP HF UL 94V-0,Black
- Contact Pin:Copper Alloy
Finish:Gold-Plated,over Nickel
- Shell:Stainless steel
Finish:Matte Tin-Plated,over Nickel
- Q'TY: 1000PCS/Reel

KB904-41 X S R 3 A

Pin No. Version
 T:TUBE (管装) Mold No.
 R:REEL (卷装) R:Right Angle
 P:P E (袋装) V:Vertical
 S:SMT
 D:DIP

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-12-15	A		KB904-41XSR3A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB904-41XSR3A
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
1	2	3	4	5	6	7	8	9

UNIT 單位	mm	PRODUCT NAME 產品名稱	FI-RE PH0.5 Wire to board Right Angle SMT Wafer
1	2	3	4