


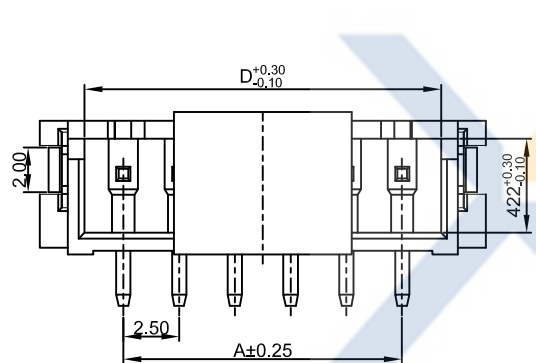
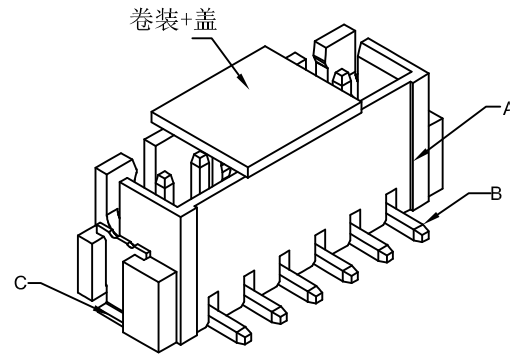



DRAWING FOR CUSTOMER

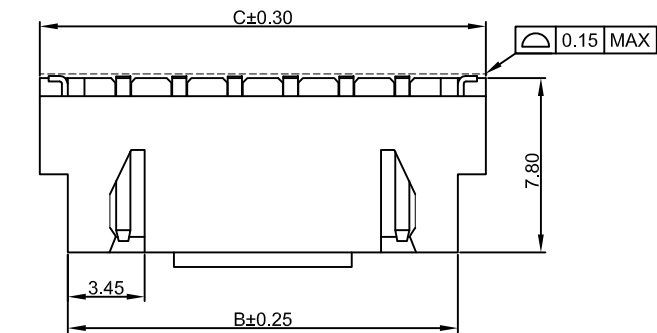

Assembly Layout

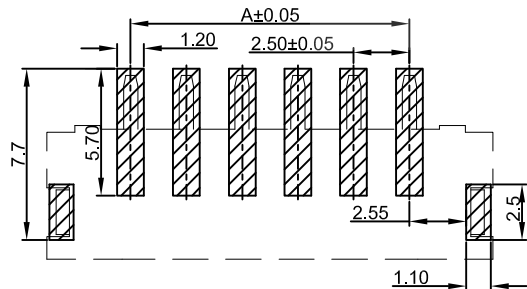

P.C.Board Layout

General Tolerance: ±0.05

■SPEC.:

- Rated Voltage:250V AC,DC
- Rated Current:3A AC,DC
- Withstand Voltage:1000V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator(A):LCP UL94V-0
- Contact Pin(B): Brass
Finish: Tin plated; over Nickel
- Solder Tab(C): Phosphor Bronze
Finish: Tin plated; over Nickel

KB952-XX X S V 6 A

Pin No. _____
 包装方式: _____
 T:TUBE (管装)
 R:REEL (卷装)
 P: PE (袋装)

Version
 Mold No. _____
 R:Right Angle
 V:Vertical
 S:SMT
 D:DIP

Poles	Dimensions (mm)			
	A	B	C	D
02	2.50	7.50	10.00	6.00
03	5.00	10.00	12.50	8.50
04	7.50	12.50	15.00	11.00
05	10.00	15.00	17.50	13.50
06	12.50	17.50	20.00	16.00
07	15.00	20.00	22.50	18.50
08	17.50	22.50	25.00	21.00
09	20.00	25.00	27.50	23.50
10	22.50	27.50	30.00	26.00
11	25.00	30.00	32.50	28.50
12	27.50	32.50	35.00	31.00
13	30.00	35.00	37.50	33.50
14	32.50	37.50	40.00	36.00
15	35.00	40.00	42.50	38.50
16	37.50	42.50	45.00	41.00

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE		VER	CHANGE HISTORY	CHANGED NAME	DRAWING	TOLERANCE	DRAWING	Devin	KB952-XXXSV6A		UNIT	mm	PRODUCT NAME	XH PH2.50mm Wire To Board SMT Vertical Wafer
日期	版本	變更歷史	修改後料號	變更者	公差	設計者	審查	Thomas	PART NO. 料號	單位		產品名稱		
2016-11-22	A			Devin	.X±0.30 .XX±0.20 .XXX±0.10	設計者	審查	Thomas	DWG NO. 圖號	PE1905028A				
						核准		William						