
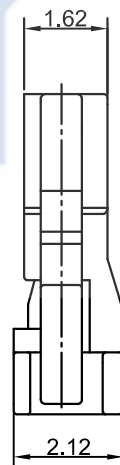
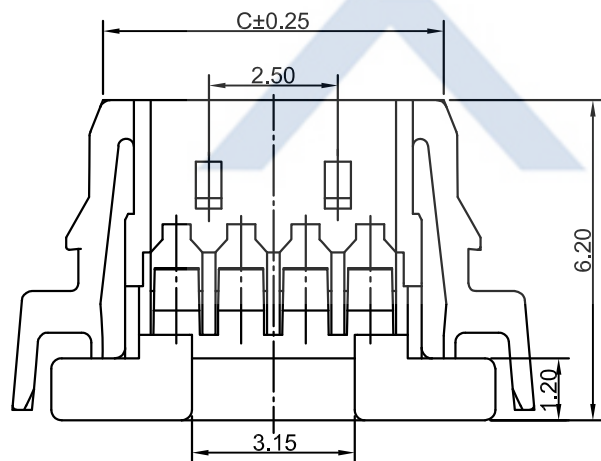
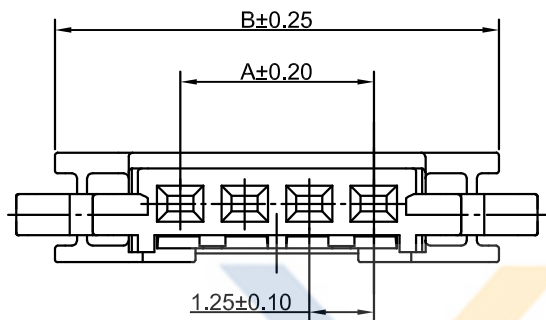


# DRAWING FOR CUSTOMER

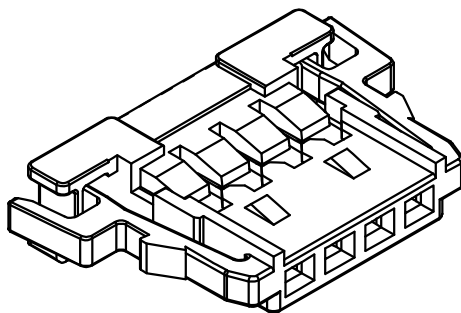


### Specifications:

#### Electrical

- Rated Voltage: 125V AC,DC
- Rated Current: 1A AC,DC
- Withstand Voltage: 250V AC/minute
- Contact Resistance: 20mΩ (MAX.)
- Insulation Resistance: 100MΩ (MIN.)
- Temperature Range: -40°C~+85°C
- Material: PA66 UL94V-0
- Applicable Wire: AWG#28~32

Poles	Part No.	Dimensions(mm)		
		A	B	C
2	KB916-02HL4A	1.25	6.10	4.10
3	KB916-03HL4A	2.50	7.35	5.35
4	KB916-04HL4A	3.75	8.60	6.60
5	KB916-05HL4A	5.00	8.85	7.85
6	KB916-06HL4A	6.25	11.10	9.10
7	KB916-07HL4A	7.50	12.35	10.35
8	KB916-08HL4A	8.75	13.60	11.60
9	KB916-09HL4A	10.00	14.85	12.85
10	KB916-10HLXA	11.25	16.10	14.10
11	KB916-11HL4A	12.50	17.35	15.35
12	KB916-12HL4A	13.75	18.60	16.60
14	KB916-14HL4A	16.25	19.85	17.85
15	KB916-15HL4A	17.50	21.10	19.10
20	KB916-16HL4A	23.75	27.35	25.35
30	KB916-20HL4A	36.25	39.85	37.85

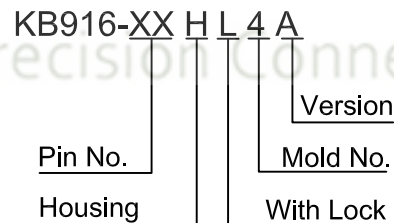

## XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2014-10-08		A	CHANGE HISTORY 變更歷史	KB916-XXHL4A	John	TOLERANCE 公差	DRAWING 設計者	John	KB916-XXHL4A		UNIT 單位		PRODUCT NAME 產品名稱	51146 PH1.25mm Wire To Board Housing With Lock
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	mm			
							APPROVED 核准	William	DWG NO. 圖號	PE3205A	mm			